

■ Control Solutions

LÜTZE Converters

LCIS Signal Converters

Microcompact Converters

LCON Converters



GOGATEC GmbH

Petritschgasse 20

A-1210 Wien

Tel.: +43 1 258 3 257 0


Fax: +43 1 258 3 257 17

office@gogatec.com

www.gogatec.com

Efficiency in Automation

Cable • Connectivity • Cabinet • Control

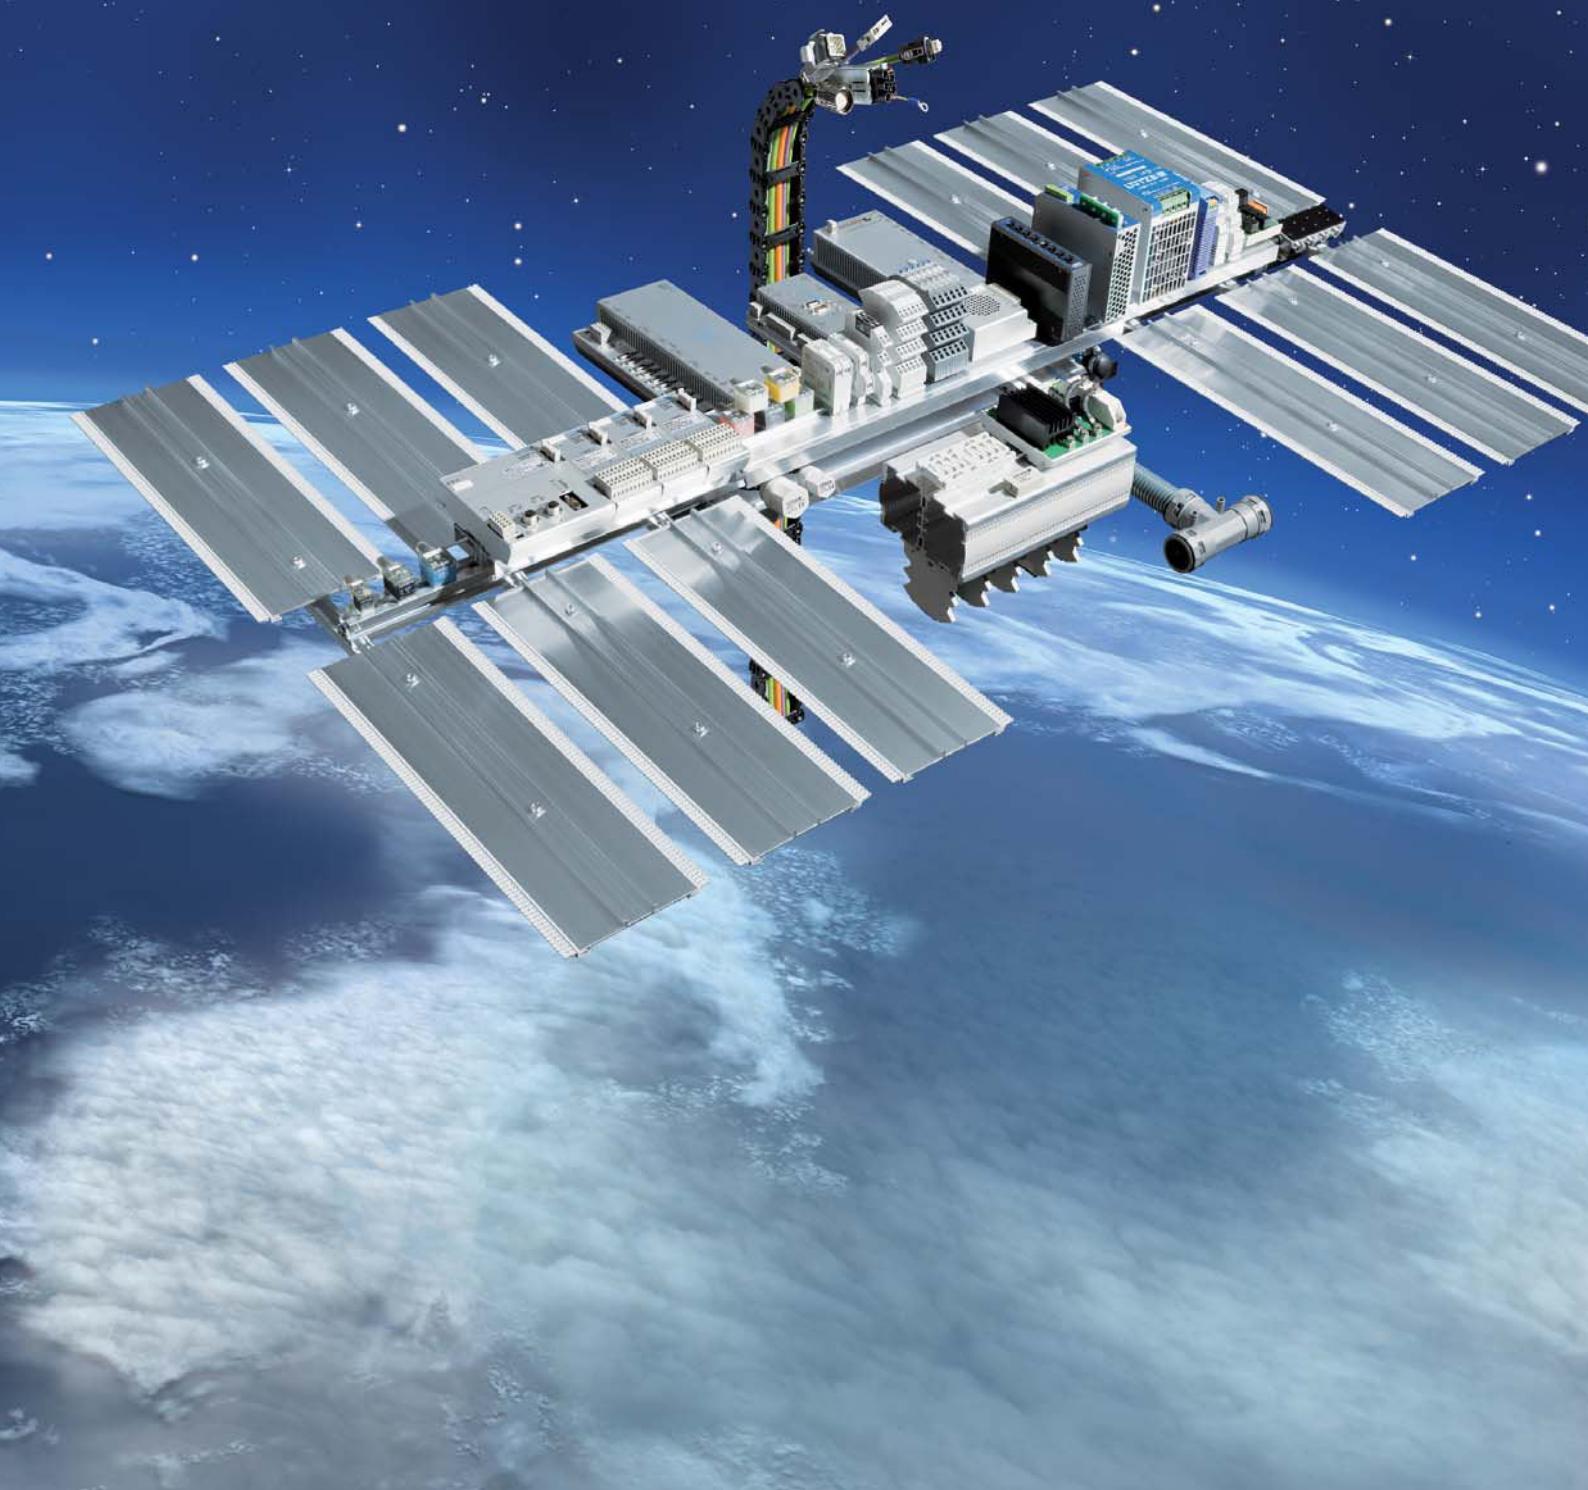

Welcome to LÜTZE

Cable Solutions



Connectivity Solutions



Cabinet Solutions



Control Solutions



Transportation Solutions



LÜTZE - Efficiency in Automation

A tradition in automation for over 60 years, with countless pioneering achievements and patents, the LUETZE INTERNATIONAL Group is today one of the leading companies in the automation industry. LÜTZE supplies very efficient electronic and electrotechnical components, system solutions for automation and high tech for rail engineering.


The comprehensive and coordinated supply program ranges from high flexing cables and cable assemblies, to energy efficient **AirSTREAM** wiring systems for control cabinets through to intelligent Industry 4.0 solutions from the fields of interface technology, current monitoring, power supply and Ethernet infrastructure.

The LUETZE INTERNATIONAL Group has multiple locations throughout Europe, Asia and the USA and numerous distribution partners across the world to provide global product availability and service to our customers in all markets.

LÜTZE is one of the leading suppliers in the rail technology field. LÜTZE Transportation solutions are installed in numerous locomotives, city rail and underground rail systems, as well as high-speed trains across the world.



Business Management: Sustainable and forward-looking

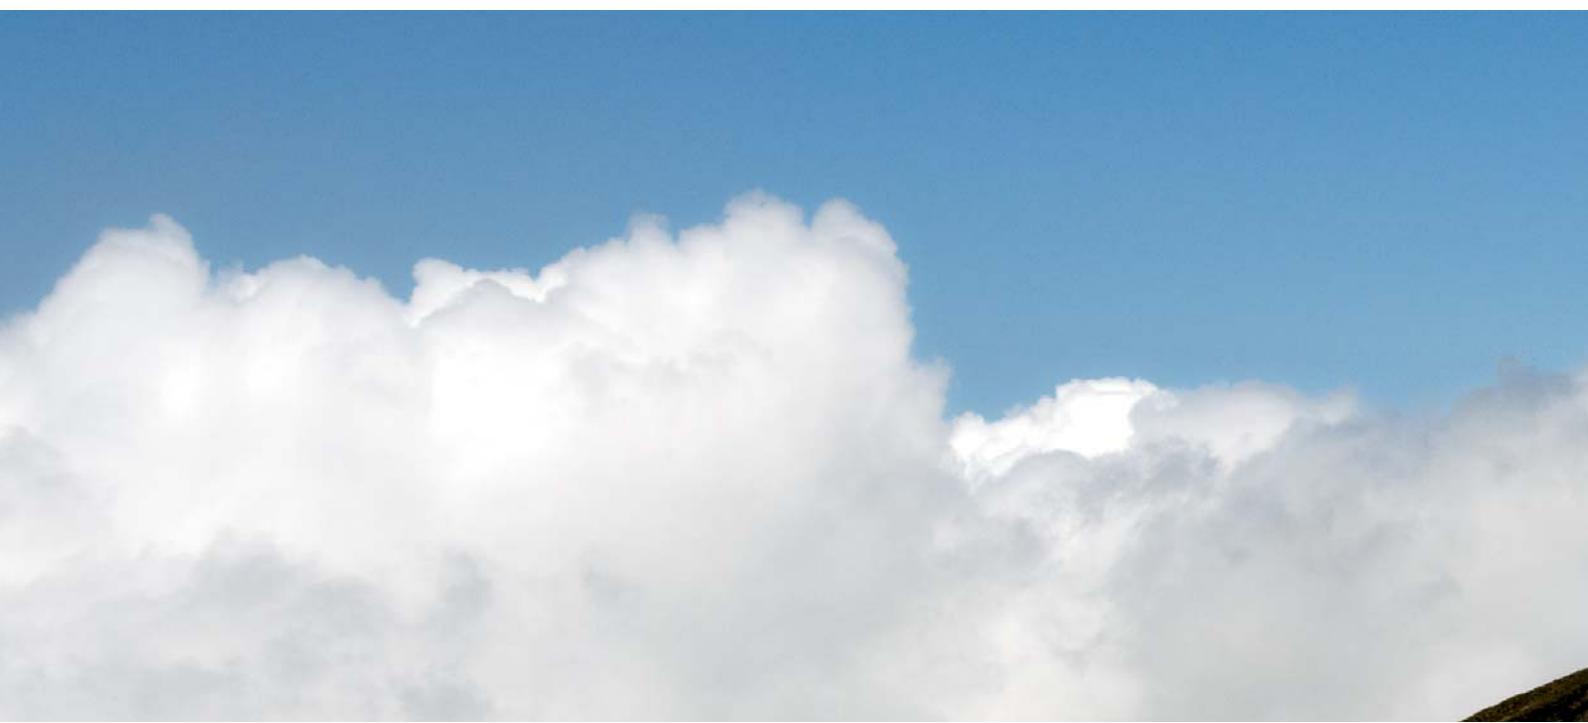

The future is blue

Sustainable enterprise means thinking and planning ahead, understanding and embedding the belief that long lasting success is more important than short-term profit maximisation.

This is an attitude that has existed within LÜTZE for quite some time. Economic and environmental responsibilities complement each other well and are reflected in the sustainable management and


product policy - and from now in the **SkyBLUE** campaign.

We manufacture our products in a resourceful and energy-conscious manner. We use long lasting, environmentally-friendly materials. And our products, in turn, help our customers save energy and resources. Good for everyone: for us, for the environment, for our customers a win-win-win situation.

ard-looking

„The competitiveness of our industry and of its suppliers depends quite substantially on how we succeed in developing practical results. The results that we produce together today, are our competitive advantages in the future.“

*Udo LÜTZE,
Member of the Executive Committee of
the Green Carbody Innovation Alliance*

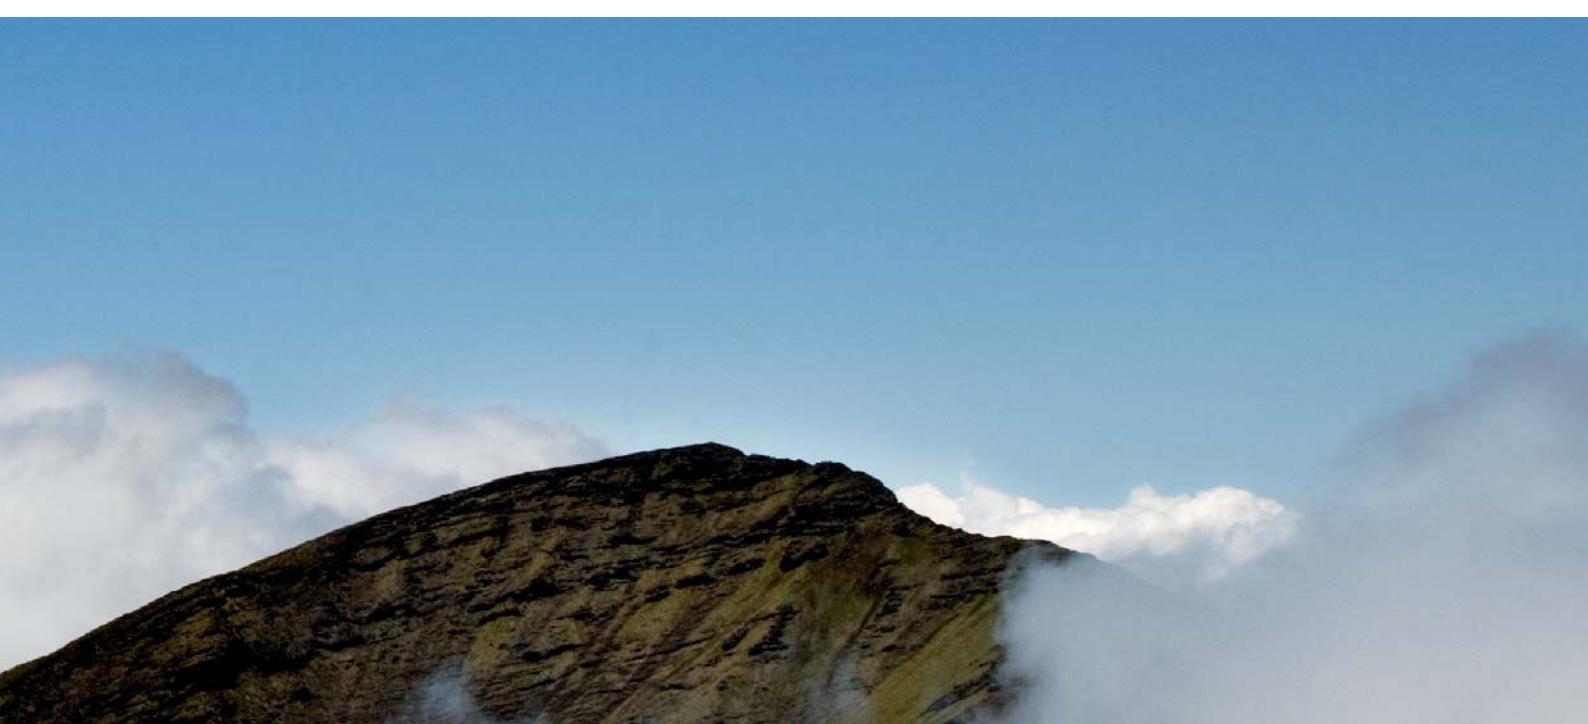

Goods with real value

The value of a product or a solution from LÜTZE is determined by its sustainable qualities as well. Every innovation is only as successful in the future if it has a long-term positive effect. Therefore, we provide long lasting as well as highly efficient components.

We are incorporating the necessary knowledge and manufacturing competence in numerous joint projects with the objective of improving energy efficiency and

sustainable technologies and industries. Thus, LÜTZE provides answers and demonstrates how to handle resources responsibly, with our environment and our future in mind.



RoHS



What moves us: Quality, innovation, eff



The people at LÜTZE

Quality, innovation and efficiency begin with people. We would not be where we are today without our highly qualified and motivated employees. An uncompromising focus on quality, nearly 60 years of experience in automation technology and of course a common desire for greater innovation and efficiency – that's what makes LÜTZE so successful.

The people at LÜTZE are familiar with automation applications and technologies across all disciplines, as they are involved with our broad range of products comprising four product areas Cable, Connectivity, Cabinet and Control.




iciency

A prime example of competence in cables: In addition to manufacturing expertise, our cable assembly specialists are familiar with all cable types and offer genuine added value. The decisive advantage: We're cable experts – since 1958.

LÜTZE SUPERFLEX®
connected



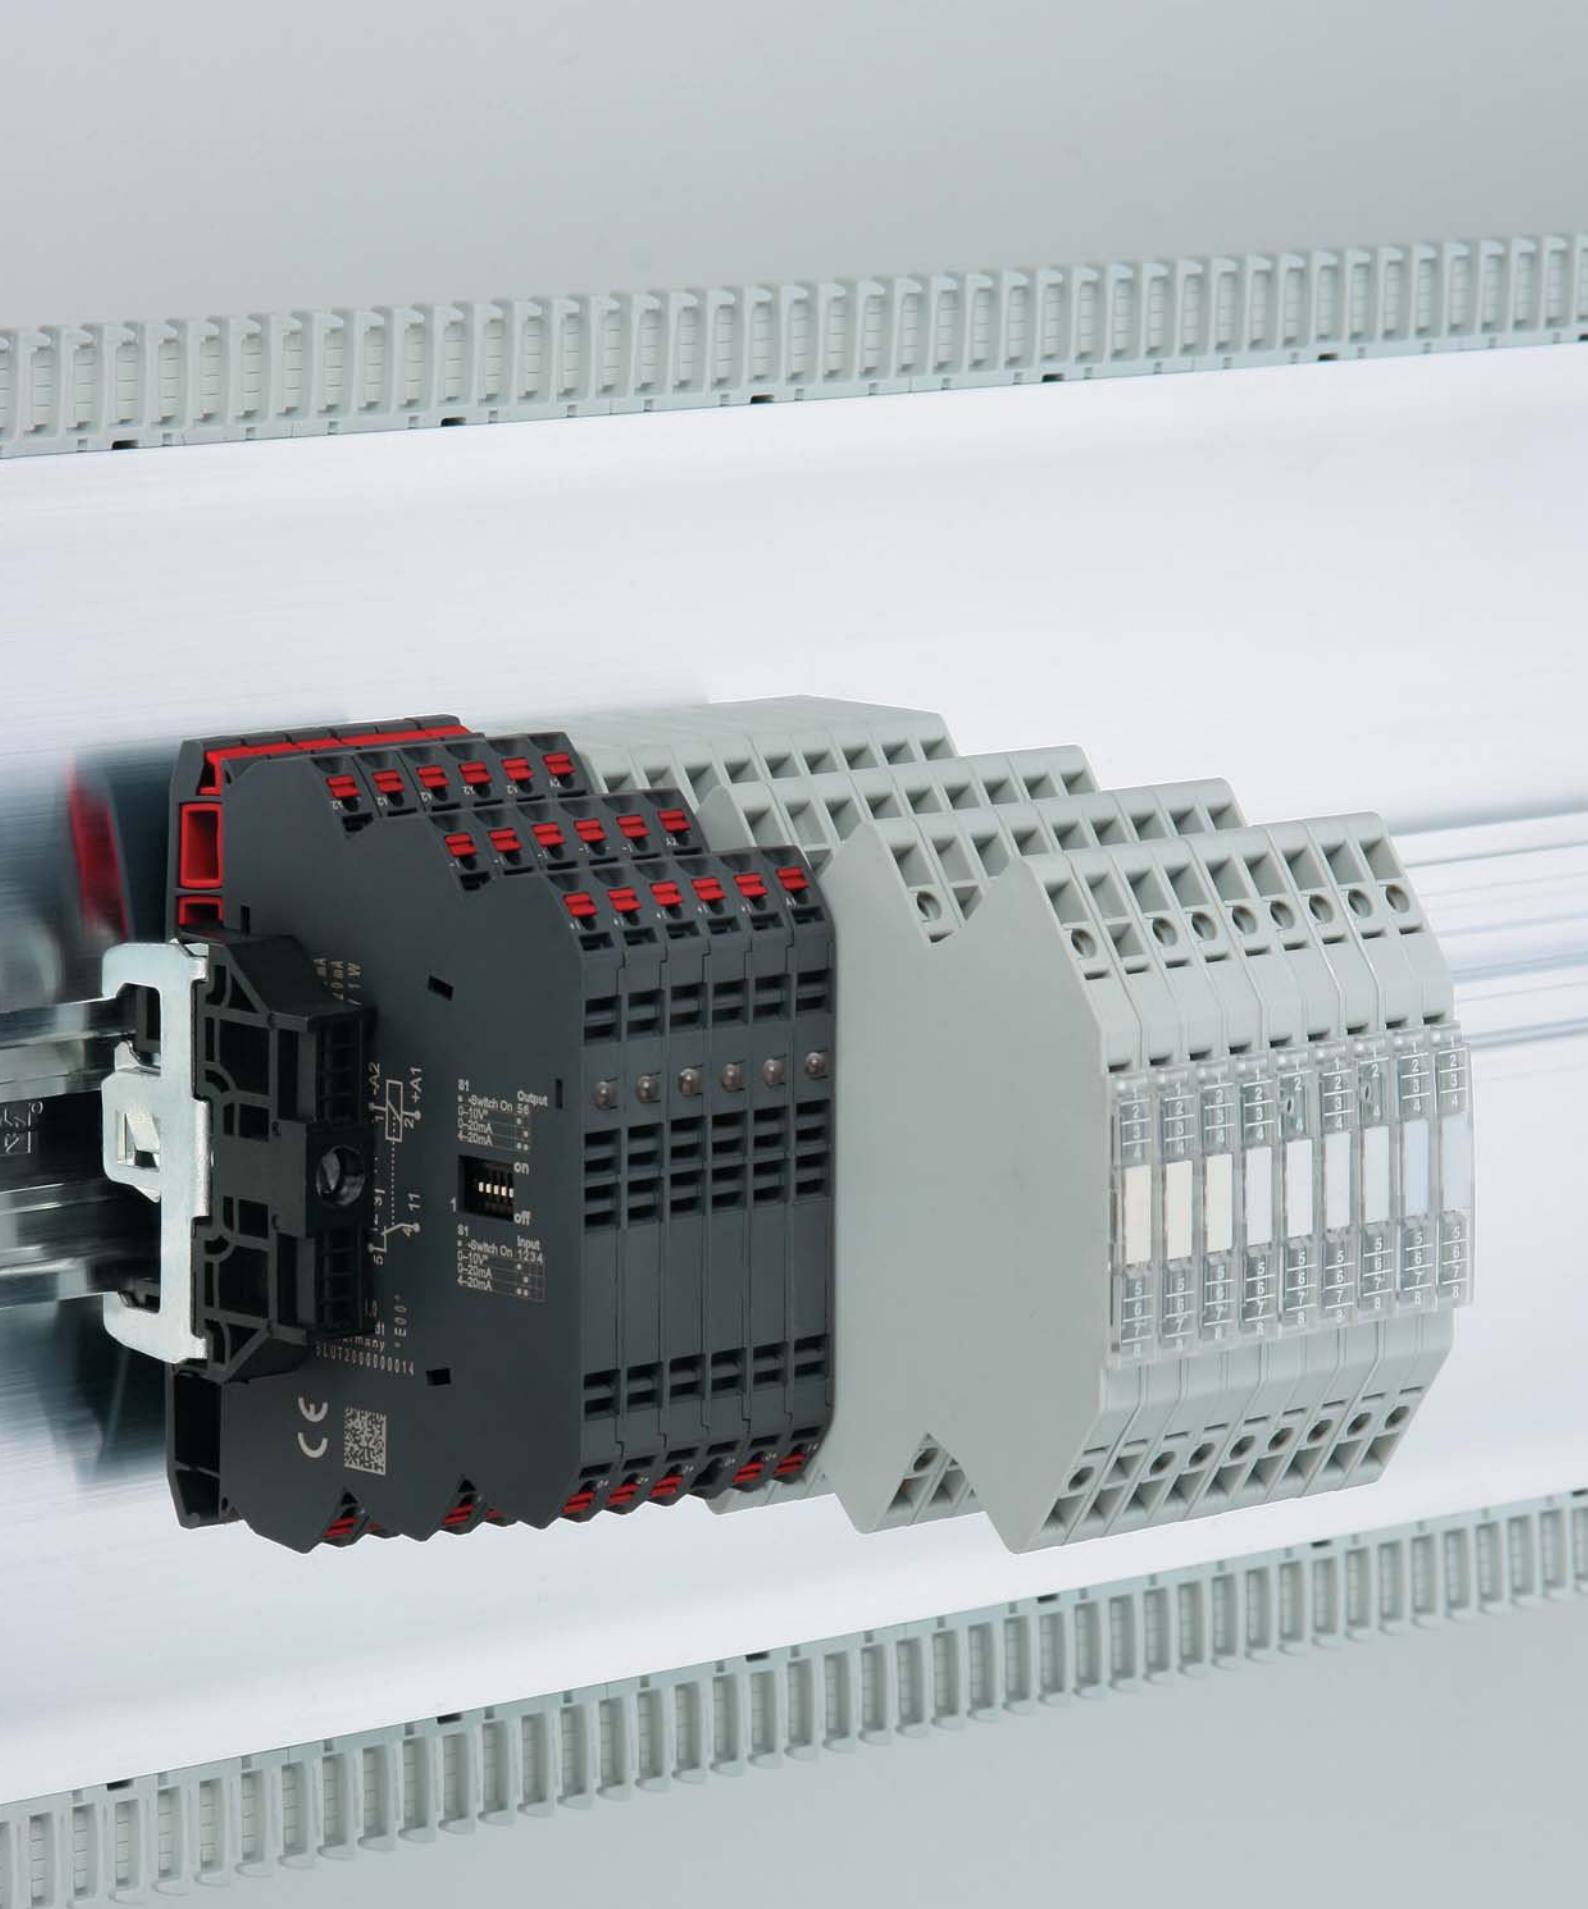

LUTZE Converters · Product Overview

LCIS



Analog/analog converter passive transformers



Analog/analog converter, active transformers



Analog/analog converter, manual/
auto signal converter



Analog/analog converter, signal converter



Potential/analog converter, active
transformers



Analog/analog converter, 0-60 mV
transformers



Temperature/analog converter, tempera-
ture converter

Page 15

Page 16-20

Page 21


Page 22-24

Page 25

Page 26

Page 27-32

Microcompact



Current/analog converter, signal
converter

Page 33-35

LCON




Analog/analog converter, interface
converter



Temperature/analog converter, interface
converter



Analog/limit value switch, interface
converter



Temperature/limit switch, interface
converter



Analog/analog splitter, interface
converter



Analog/analog / limit
value switch, interface
converter

Page 38

Page 39

Page 40

Page 41

Page 42

Page 43

Accessories



USB Service Cable



Labeling system



Insulated jumper
combs - accessories
LCIS



Insulated jumper
combs - accessories
microcompact

Page 44

Page 45

Page 46

Page 47

LUTZE Converters · Basics

General description of converters

Converters are needed in a wide variety of areas in industry in order to perform the following basic tasks:

1. Signal conversion
2. Signal amplification
3. Signal isolation
4. Signal filtering

A converter is normally constructed as shown in the following schematic:




Figure : Schematic of a converter

Input signals may be:

- Voltages
- Currents
- Frequencies
- Other adapted physical quantities (e.g. pressure, temperature, humidity, PH values, etc.)

Output signals may be:

- Voltages
- Currents
- Frequencies
- Signals for field bus interfaces

A further distinction is made between analog and digital signals, which may be both input and output signals.

The input signals must be converted from the required output signals. In this context conversion means:

- Actual conversion of signals (e.g. from voltage into current)
- Amplification of signals (e.g. from low-level signals to standard signals)
- Electrical isolation and where appropriate amplification of signals (e.g. of analog signals)
- Filtering of interference (e.g. of HF interference from analog signals)

The supply feeds power to the converter. It is required as additional auxiliary power to implement active isolation.

Transmitters

These kinds of converter transform input signals into other physical quantities.

The following lists some examples:

Input signal	Output signal
Voltage	Current/Frequency
Current	Voltage/Frequency
Frequency	Voltage/Current

Various input signals in analog or digital form, as are outputted by puls generators, thermocouples or resistance pick-ups for example, are converted in the transmitters into the desired standardised outputs.

Standard signals (unit signals)

Unit signals are standardised electrical signals in process automation.

Commonly used unit signals include current signals to DIN IEC 60381-1:

- 0 to 20 mA
- 4 mA to 20 mA (live zero)

and voltage signals to DIN IEC 60381-2:

- 0 to 10 V
- 2 V to 10 V (live zero)

Live-zero signals are used in almost all industrial applications. If the start of the measuring range is assigned an electrical signal other than 0 (zero), a wire break monitor can be implemented. The non-zero initial signal is also termed "live zero". A 0 mA signal is thus always a reliable indicator of a fault.

Current signals are preferred over voltage signals because the current signal is immune to electromagnetic interference (switch-on of adjacent consumers) and voltage losses due to the line resistance.

The maximum length of the signal line is limited only by the maximum load impedance which can be operated by the current source. The 4 mA... 20 mA unit of current signal offers the additional major advantage that the signal circuit is continuously powered. That power can be used by transmitters for their own supply. In this case the PLC must power the signal circuit (passive sensor). An active sensor needs an external power supply for its own demand.

General technical information

Input protection

Describes the protection measures taken and indicates the maximum possible input signal.

Suppressor diodes are mostly used to limit voltage and PTC resistors to limit current.

Input resistance

To ensure low load on the input signal, current inputs are always executed as low-resistance and voltage inputs as high-resistance:

I: <100 Ω; U: > 10kΩ

Voltage drop

This relates to passive converters. The voltage drop is dependent on the load impedance and on the device's own power demand. For the applicable values refer to the relevant data sheets.

True RMS measurement

The effective value indicates the value at which the same electrical energy is implemented on an ohmic converter with an equivalent variable. The RMS value depends on the peak value and on the curve form. Lütze current or voltage converters offer true RMS measurement as standard, so non-sinusoidal input quantities can also be correctly measured.

Zero/Span

On conventional devices a zero/span balance must be carried out. This is done by means of two separate potentiometers. Vibration, temperature and other influences alter the set values, so periodically a recalibration is required.

Zero-balancing adjusts the zero setting of the output relative to the input. The output signal is amplified relative to the input signal by way of the span balance.

This balancing must also be carried out when the range is changed, such as by DIP switches.

Lütze converters feature automatic, non-temperature-dependent balancing. Recalibration is not necessary, even in the event of a range change.

Load impedance

The load impedance provides information about the load capacity of the output.

LUTZE Converters · Basics

The values for current output lie in a range of $400\ \Omega$ and $700\ \Omega$, for voltage outputs they are $2\ k\Omega$ or higher.

Wire break and short-circuit

As already described under "Standard signals", a wire break can be detected by way of a live-zero signal. In monitoring of connected sensors (such as temperature), monitoring for wire break or short-circuit is effected by an internal electronics unit. Such faults can be indicated in different ways:

- LED
- Defined output signal
- Separate output

Linearity error

Linearity error refers to a deviation from the ideal transmission accuracy without zero/span errors. The figure is given as a percentage.

Accuracy (FSR)

The value indicates the deviation of the output signal relative to the input signal. The figure is always given as a percentage referred to the maximum signal output value, e.g. 10V (full scale range) at room temperature (23°C). The linearity error is built-in to this value.

Temperature coefficient

Describes the deviating accuracy dependent on the ambient temperature. The figure is normally given in ppm/K (parts per million/Kelvin).

Example:

30 ppm/K corresponds to 0.003 %/K

Transmission error

The total deviation of the output signal from the input signal is the sum of the accuracy + temperature coefficient.

Transfer frequency

DC signals are normally transmitted. Signal changes demand a dynamic response however. The transmission frequency indicates the frequency up to which alternating current or voltage can also be transmitted.

Rise time (10% / 90 %)

The response time of the output signal to a change in the input signal from 10% to 90% of the nominal value.

Settling time

The time taken by the output to reach a value with an inaccuracy of 1%. This value already takes account of the rise time.

Ambient-temperature range

The values specified by Lütze relate to a 100% duty cycle. Normally condensation is ruled out. For devices which allow condensation, the fact will be indicated on the "Relative humidity" line or it will be stipulated that the device in question conforms to EN 50155.

Basics of transmission interference

Interference on signal transmission

Error-free, undisturbed, secure signal transmission is vital to the reliable control of processes. Analog signals transmitted between the control side (PLC or instrumentation and control system) and the sensors/actuators are almost always subject to external interference. There is considerable potential for interference especially given the rough industrial environment and long transmission distances.

Electromagnetic interference

The best known and most widespread interference is that caused by capacitive and inductive effects. In these also cross-cable coupling processes overvoltages may occur which, for example, can destroy input/output modules of a PLC or an industrial computer. To protect those expensive downstream components, it is advisable to use A/A modules. They ensure a defined transition from peripherals and evaluation electronics.


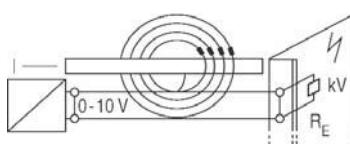


Figure: Electromagnetic interference


Potential differences

Potential differences occur as a result of earth or chassis loops. If signal transmitters and receivers refer to the earth potential - i.e. the earth is used as a return conductor in signal transmission - this is known as an earth loop. As the distance between the transmitter and receiver increases, the earth resistance increases as the line gets longer. As a result voltage differences of as much as 200 V can occur.

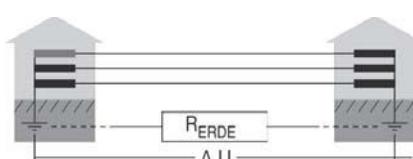

Potential differences due to earth loops

In sequenced measuring circuits potential differences occur due to earth loops. Interconnecting multiple measuring circuits increases the reference voltage with possibly fatal consequences for the data transfer.

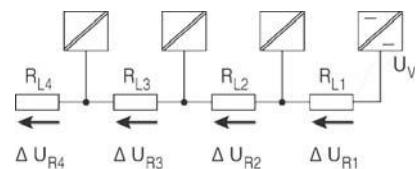

Potential differences due to chassis loops

A/A modules are a simple means of bypassing this interference. They electrically isolate the signal input and output, decoupling the measuring circuits. As well as isolating the signal, this also filters out interference. The signals are amplified for longer transmission distances and adapted to the desired output quantities for the evaluation electronics. For optimum functional reliability, as well as the converters shielded cable with twisted-pair wires should additionally be used.

Isolation techniques

There are various ways of isolating potential.

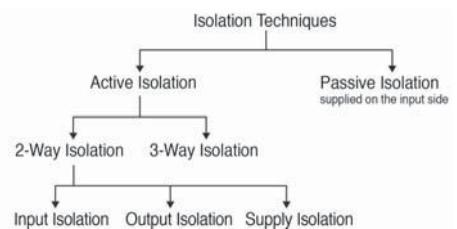


Diagram: Isolation techniques

Active isolation

An additional supply voltage is required for all kinds of active isolation.

3-way disconnection

A characteristic feature of 3-way isolation is complete insulation of all the components from each other, so protecting against mutual interference.

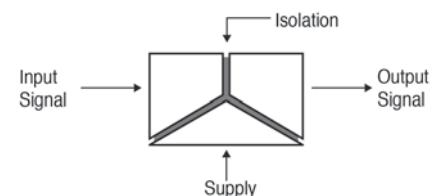


Diagram: 3-way isolation

LUTZE Converters · Basics

The input, output and supply - and thus also all equipment connected to them - are mutually electrically isolated. In this way the input and output circuits are decoupled from the supply and the input and output circuits are decoupled from each other. The input signals must be active signals. The output signal is an amplified filtered signal.

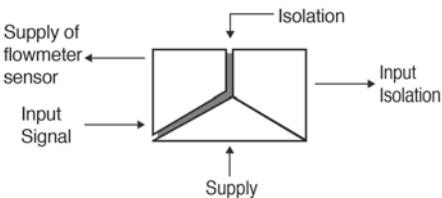


Figure: 2-way supply isolation

2-way isolation: Input isolation

In this form of isolation the input is electrical isolated from the output and the supply, which are both connected to the same potential.

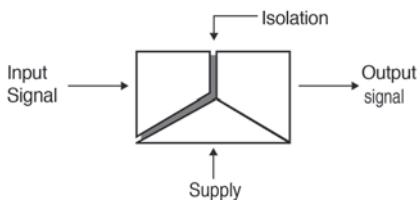


Figure: 2-way input isolation

By this isolation method equipment connected to the output can be effectively protected against interference. The input signals must be active signals. The output signal is an amplified filtered signal.

2-way isolation: Output isolation

In this form of isolation the output is electrically isolated from the input and the supply, which are both connected to the same potential.

Passive isolation

In contrast to active isolation, no additional supply voltage is required for passive isolation. The power required for electrical isolation and signal transmission is drawn from the input circuit. A minor voltage drop at the input of the isolation module is used for this. The input measurement signal is burdened with this voltage drop. The responding current for the function of the modules is just a few Amperes. The resultant transmission error is negligible. By this isolation method no signal amplification is possible. Also, these isolation modules do not operate reaction-free. This means that every load on the output places an equal load on the input signal. Isolation modules without auxiliary power transmit unipolar current signals at a ratio of 1:1. The possible load impedance voltage at the output is lower than the load capacity of the input signal by the amount of voltage drop at the input in the event of an output short-circuit (own voltage demand).

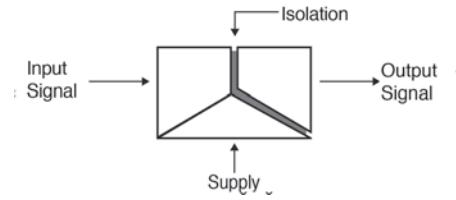


Figure: 2-way output isolation


By this isolation method, equipment connected to the input can be effectively protected against interference. The input signals must be active signals. The output signal is an amplified filtered signal.

2-way isolation: Supply isolation

In this form of isolation an additional supply is provided at the input. This auxiliary power is used to operate passive sensors connected on the input side. The structure of this isolation method is identical to that of input isolation. The supply and output are again connected to the same potential.

Figure: Passive isolation, supply input

By this isolation method, earth loops can be isolated and signals filtered for example. The input signals must be active current signals. The output signal is likewise a current signal.

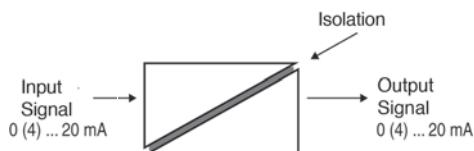

Open FDT Technology

FDT technology, what is it?

FDT standardizes the communication and configuration interface between all field devices and host systems. FDT provides a common environment for accessing the devices' most sophisticated features. Any device can be configured, operated, and maintained through the standardized user interface – regardless of supplier, type or communication protocol.

The FDT interface – Integration standard

The FDT interface is the specification describing the standardized data exchange between devices and control system or engineering or asset management tools.

DTM – Device driver

DTMs are classified into two categories:

- Device DTMs which connect to the field device configuration components
- CommDTMs which connect to the software communication components.

The DTM provides a unified structure for accessing device parameters, configuring and operating the devices, and diagnosing problems. DTMs can range from a simple Graphical User Interface for setting device parameters to a highly sophisticated application capable of performing complex real-time calculations for diagnosis and maintenance purposes.

DeviceDTM

Provided by the device manufacturer

Represents the whole logic and parameters of a device

Standardized interface to the FDT Frame Application

Can be used in any FDT Frame Application

DTM Style Guide

CommDTM

Represents communication components like PC communication cards, couplers, gateways, remote I/Os, and linking devices.

FDT Frame Application – Host system


The Frame Application is a software program that implements Device DTMs and CommDTMs. The Frame Application provides:

- Common environment
- User Management
- DTM Management
- Data Management
- Network Configuration
- Navigation




Open FDT Technology

How to implement Lütze DTM's into **PACTware™**

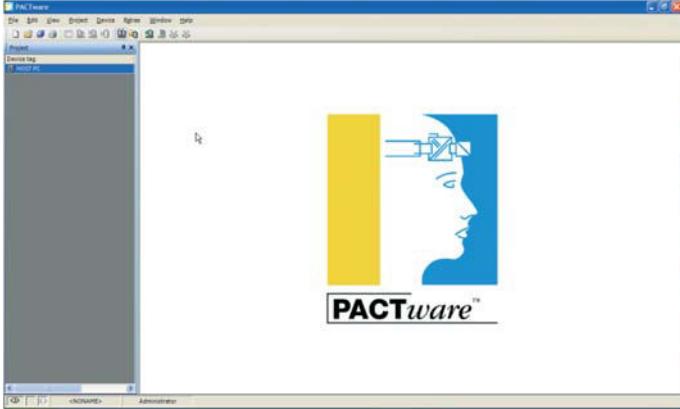

1. Add device

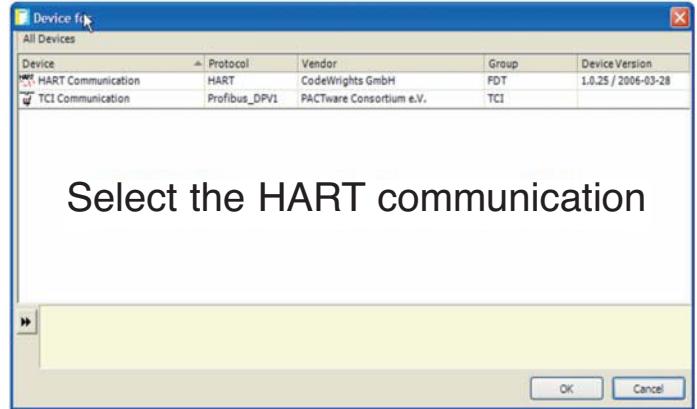


Select the HART communication

2. Select the communication channel




3. Again, add device

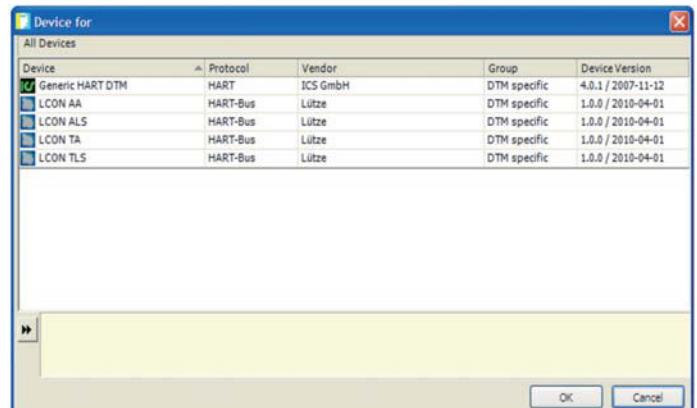

4. Select needed Lütze DTM



5. Device is displayed

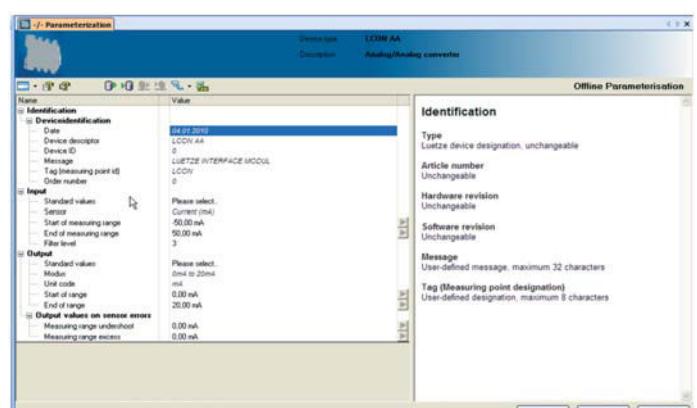

6. Double clic on the device open the list of parameter

Interface Technology · LCIS analog/analog converter, passive


Input: 4–20 mA

Output: 4–20 mA


Insulation: 1.5 kV, 2-way isolation, passive converter



Dimensions



PIN assignment



Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	passive	750528.0000 A*	LCIS-P1K-0528-62-S
Push-In			
Rated voltage U_N	passive	751528.0000 S*	LCIS-P1K-1528-62-PI
Input	750528.0000	751528.0000	
Input signal	4–20 mA		
Galvanic isolation I/O	2-way isolation		
Output			
Output signal	4–20 mA		
Max. load impedance at I-output	$1000 \Omega (R_B)$		
Output current	—		
Residual ripple	<5 mV _{eff} (load impedance 100 Ω)		
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	—		
Build-up time (Accuracy 1%)	6 ms (for working resistance 500 Ω and 20 mA)		
General			
Rated voltage U_N	passive		
Status indication	—		
Input/output protection	Suppressor diode (33 V)		
Burden error	<0.06 % from measured value / 100 Ω working resistance		
Temperature drift /K	<150 ppm / K FSR		
Temperature drift (working resistance >600R)	<100 ppm / K FSR		
Temperature drift (working resistance >600R)	<150 ppm / K FSR		
Insulation voltage input / output	1.5 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +80 °C		
Dimensions (w × h × d)	6.2 × 93.0 × 71.0 mm		
Weight	0.030 kg/piece		
Approvals	cULus (E135145), DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	127 fit		
Failure rate at +45 °C	7892161 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		
Comments	When connected this passive isolator has a non-reactive transmission, so that the current in the input circuit is not interrupted for an output interruption.		

Interface Technology · LCIS analog/analog converter


Input: 0–10 V / 0–20 mA / 4–20 mA

Output: 0–10 kHz


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

S1	Input	1	2	3	4
●—Switch On		●			
0–10 V*		●			
0–20 mA		●			
4–20 mA		●	●		

S1	Output	5	6
●—Switch On			
0–50 Hz*			
0–100 Hz		●	
0–1000 Hz		●	
0–10000 Hz		●	●

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24 V	750511.0000 R*	LCIS-WAF-0511-62-S
Push-In			
Rated voltage U_N	AC/DC 24 V	751511.0000 S*	LCIS-WAF-1511-62-PI
Input	750511.0000	751511.0000	
Input signal	0–10 V, 0–20 mA, 4–20 mA, adjustable via DIP switch S1		
Input resistance	>300 kΩ @ 0–10 V, <100 Ω @ 0–20 mA, 4–20 mA		
Galvanic isolation I/O		3-way isolation	
Zero / Span		Production comparison	
Output			
Output signal	0–50 Hz, 0–100 Hz, 0–1 kHz, 0–10 kHz adjustable via DIP switch S1		
Residual ripple		—	
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	0.05 % FSR		
Build-up time (Accuracy 1%)	—		
Critical frequency	30 Hz @ 3 dB		
Temperature coefficient	<150 ppm / K FSR		
General			
Rated voltage U_N	AC/DC 24 V		
Operation voltage range	AC 19.2–26.4 V / DC 18.0–31.2 V		
Status indication	LED green		
Input/output protection	Overvoltage, current input with PTC fuse, short circuit-proof output frequency-dependent		
Rise time (10 - 90%)			
Insulation voltage input / output	2.5 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / Push-In single wire 0.25 mm ² –2.5 mm ² / mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	16
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 93.0 × 73.0 mm		
Weight	0.029 kg/piece		
Approvals	cULus (E135145), DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	667 fit		
Failure rate at +45 °C	1498305 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

Interface Technology · LCIS analog/analog converter


Input: 0–10 V / 0–20 mA / 4–20 mA

Output: 0–10 V / 0–20 mA / 4–20 mA

Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment

Input	I+ 3	I- 2	Output	O+ 4	O- 5	Power	0V 1
							Ub 6

Range adjustment

S1	Input	Output
●→ Switch On	1 2 3 4	5 6
0–10V*	●	
0–20mA	●	●
4–20mA	●●	

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24 V	750539.0000 A* LCIS-WAA-0539-62-S	1
Push-In			
Rated voltage U_N	AC/DC 24 V	751539.0000 S* LCIS-WAA-1539-62-PI	1
Input	750539.0000	751539.0000	
Input signal	0–10 V, 0–20 mA, 4–20 mA, adjustable via DIP switch S1		
Input resistance	>300 kΩ @ 0–10 V, <100 Ω @ 0–20 mA, 4–20 mA		
Galvanic isolation I/O	3-way isolation		
Zero /Span	Production comparison		
Output			
Output signal	adjustable via DIP switch S1		
Max. load impedance at I-output	500 Ω @ 0–20 mA, 4–20 mA		
Min. load impedance at U-output	2 kΩ @ 0–10 V		
Output current	max. 5 mA @ 0–10 V		
Output voltage	< 16 V @ 0–20 mA, 4–20 mA		
Residual ripple	<20 mVeff _{eff}		
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	0.05 % FSR		
Build-up time (Accuracy 1%)	17 ms		
Critical frequency	30 Hz @ 3 dB		
Temperature coefficient	<150 ppm / K FSR		
General			
Rated voltage U_N	AC/DC 24 V		
Operation voltage range	AC 19.2–26.4 V / DC 18.0–31.2 V		
Status indication	LED green		
Input/output protection	Overvoltage, current input with PTC fuse, short circuit-proof output		
Rise time (10 – 90%)	6 ms		
Insulation voltage input / output	2.5 kVeff		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	16
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +80 °C		
Dimensions (w × h × d)	6.2 × 93.0 × 73.0 mm		
Weight	0.030 kg/piece		
Approvals	cULus (E135145), DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	531 fit		
Failure rate at +45 °C	1881921 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

Interface Technology · LCIS analog/analog converter


Input: 0–10 V

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Description	Part-No.	Type	PU
Screw terminal			
Output signal	0 – 10 V	750530.0000	R* LCIS-WAA-0530-62-S
	0–20 mA	750531.0000	R* LCIS-WAA-0531-62-S
	4–20 mA	750532.0000	R* LCIS-WAA-0532-62-S
Push-In			
Output signal	0 – 10 V	751530.0000	S* LCIS-WAA-1530-62-PI
	0–20 mA	751531.0000	S* LCIS-WAA-1531-62-PI
	4–20 mA	751532.0000	S* LCIS-WAA-1532-62-PI
Input			
Input signal		0–10 V	
Galvanic isolation I/O		3-way isolation	
Zero /Span		Production comparison	
Output			
Output signal	0 – 10 V	0–20 mA	4–20 mA
Residual ripple		<20 mVeff _{eff}	
Max. load impedance at I-output	–	500 Ω	
Operating data			
Accuracy		0.1 % FSR @ 23 °C	
Linearity error		0.05 % FSR	
Build-up time (Accuracy 1%)		17 ms	
Critical frequency		30 Hz @ 3 dB	
Temperature coefficient		<150 ppm / K FSR	
General			
Rated voltage U _N		AC/DC 24 V	
Operation voltage range		AC 19.2–26.4 V / DC 18.0–31.2 V	
Status indication		LED green	
Input/output protection		Overvoltage, current input with PTC fuse, short circuit-proof output	
Rise time (10 - 90%)		6 ms	
Insulation voltage input / output		2.5 kV _{eff}	
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)	
Color of the housing		RAL 7012 basalt grey	
Mounting		DIN rail mountable TS35 (EN 60715)	
Protection class		IP20	
Installation position		any	
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	16
Operation temperature range		-25 °C ... +60 °C	
Storage temperature range		-40 °C ... +80 °C	
Dimensions (w × h × d)		6.2 × 93.0 × 73.0 mm	
Weight		0.029 kg/piece	
Approvals		cULus (E135145), DNV GL	
Standards		EN 60947-5-1	
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C		504 fit	
Failure rate at +45 °C		1983891 h	
1 fit equals one failure per 10 ⁹ component hours			
The indicated temperature is the mean component ambient temperature.			
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

Interface Technology · LCIS analog/analog converter


Input: 0–20 mA

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Description	Part-No.	Type	PU
Screw terminal			
Output signal	0 – 10 V	750533.0000	R*
	0–20 mA	750534.0000	R*
	4–20 mA	750535.0000	R*
Push-In			
Output signal	0 – 10 V	751533.0000	S*
	0–20 mA	751534.0000	S*
	4–20 mA	751535.0000	S*
Input			
Input signal		0–20 mA	
Galvanic isolation I/O		3-way isolation	
Zero / Span		Production comparison	
Output			
Output signal	0 – 10 V	0–20 mA	4–20 mA
Residual ripple		<20 mVeff _{eff}	
Max. load impedance at I-output	–	500 Ω	
Operating data			
Accuracy		0.1 % FSR @ 23 °C	
Linearity error		0.05 % FSR	
Build-up time (Accuracy 1%)		17 ms	
Critical frequency		30 Hz @ 3 dB	
Temperature coefficient		<150 ppm / K FSR	
General			
Rated voltage U _N		AC/DC 24 V	
Operation voltage range		AC 19.2–26.4 V / DC 18.0–31.2 V	
Status indication		LED green	
Input/output protection		Overvoltage, current input with PTC fuse, short circuit-proof output	
Rise time (10 – 90%)		6 ms	
Insulation voltage input / output		2.5 kV _{eff}	
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)	
Color of the housing		RAL 7012 basalt grey	
Mounting		DIN rail mountable TS35 (EN 60715)	
Protection class		IP20	
Installation position		any	
Connection type		Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16
Operation temperature range		-25 °C ... +60 °C	
Storage temperature range		-40 °C ... +80 °C	
Dimensions (w × h × d)		6.2 × 93.0 × 73.0 mm	
Weight		0.029 kg/piece	
Approvals		cULus (E135145), DNV GL	
Standards		EN 60947-5-1	
Failure Rate Prediction (MTBF)			
Standards		Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500	
Failure rate at +45 °C		504 fit	
Failure rate at +45 °C		1983891 h	
1 fit equals one failure per 10 ⁹ component hours			
The indicated temperature is the mean component ambient temperature.			
Comments		The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year	

Interface Technology · LCIS analog/analog converter


Input: 4–20 mA

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Description	Part-No.	Type	PU
Screw terminal			
Output signal	0 – 10 V	750536.0000	R* LCIS-WAA-0536-62-S
	0–20 mA	750537.0000	R* LCIS-WAA-0537-62-S
	4–20 mA	750538.0000	R* LCIS-WAA-0538-62-S
Push-In			
Output signal	0 – 10 V	751536.0000	S* LCIS-WAA-1536-62-PI
	0–20 mA	751537.0000	S* LCIS-WAA-1537-62-PI
	4–20 mA	751538.0000	S* LCIS-WAA-1538-62-PI
Input			
Input signal		4–20 mA	
Galvanic isolation I/O		3-way isolation	
Zero /Span		Production comparison	
Output			
Output signal	0 – 10 V	0–20 mA	4–20 mA
Residual ripple		<20 mVeff _{eff}	
Max. load impedance at I-output	–	500 Ω	
Operating data			
Accuracy		0.1 % FSR @ 23 °C	
Linearity error		0.05 % FSR	
Build-up time (Accuracy 1%)		17 ms	
Critical frequency		30 Hz @ 3 dB	
Temperature coefficient		<150 ppm / K FSR	
General			
Rated voltage U _N		AC/DC 24 V	
Operation voltage range		AC 19.2–26.4 V / DC 18.0–31.2 V	
Status indication		LED green	
Input/output protection		Overvoltage, current input with PTC fuse, short circuit-proof output	
Rise time (10 - 90%)		6 ms	
Insulation voltage input / output		2.5 kV _{eff}	
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)	
Color of the housing		RAL 7012 basalt grey	
Mounting		DIN rail mountable TS35 (EN 60715)	
Protection class		IP20	
Installation position		any	
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	16
Operation temperature range		-25 °C ... +60 °C	
Storage temperature range		-40 °C ... +80 °C	
Dimensions (w × h × d)		6.2 × 93.0 × 73.0 mm	
Weight		0.029 kg/piece	
Approvals		cULus (E135145), DNV GL	
Standards		EN 60947-5-1	
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C		504 fit	
Failure rate at +45 °C		1983891 h	
1 fit equals one failure per 10 ⁹ component hours			
The indicated temperature is the mean component ambient temperature.			
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

* S Article from stock
A Available with a lead time
R Available on request

Interface Technology · LCIS analog/analog converter


Input: 0–10 V / 0–20 mA / 4–20 mA, manual off automatic

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2,5 kV / 4 kV, 3-way isolation, Wide range input



Dimensions



PIN assignment



Range adjustment

S1	Input
●→Switch On	1 2 3 4
0–10V*	●
0–20mA	●
4–20mA	●●

S1	Output
●→Switch On	5 6
0–10V*	●
0–20mA	●
4–20mA	●●

Description	Part-No.	Type	PU			
Screw terminal						
Rated voltage U _N	AC/DC 24 V	750518.0000 R*	LCIS-WAA-MA-0518-175-S			
	AC/DC 24–240 V	750519.0000 R*	LCIS-WP-WAA-MA-0519-S			
Push-In						
Rated voltage U _N	AC/DC 24 V	751518.0000 S*	LCIS-WAA-MA-1518-175-PI			
	AC/DC 24–240 V	751519.0000 S*	LCIS-WP-WAA-MA-1519-PI			
Input						
Input signal	0–10 V, 0–20 mA, 4–20 mA, adjustable via DIP switch S1					
Input resistance	>300 kΩ @ 0–10 V, <100 Ω @ 0–20 mA, 4–20 mA					
Galvanic isolation I/O	3-way isolation					
Zero /Span	Production comparison					
Output						
Output signal	0–10 V, 0–20 mA, 4–20 mA adjustable via switch					
Max. load impedance at I-output	500 Ω @ 0–20 mA, 4–20 mA					
Min. load impedance at U-output	2 kΩ @ 0–10 V					
Output current	max. 5 mA @ 0–10 V					
Output voltage	< 18 V @ 0–20 mA, 4–20 mA					
Residual ripple	<20 mVeff					
Operating data						
Accuracy	0.1 % FSR @ 23 °C					
Linearity error	0.05 % FSR					
Build-up time (Accuracy 1%)	17 ms					
Critical frequency	30 Hz @ 3 dB					
Temperature coefficient	<150 ppm / K FSR					
General		AC/DC 24 V	AC/DC 24–240 V			
Operation voltage range	AC 19.2–26.4 V / DC 18.0–31.2 V					
Status indication	LED green					
Input/output protection	Overvoltage, current input with PTC fuse, short circuit-proof output					
Rise time (10 - 90%)	6 ms					
Insulation voltage input / output	2.5 kV _{eff}	4.0 kV _{eff}				
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)					
Color of the housing	RAL 7012 basalt grey					
Mounting	DIN rail mountable TS35 (EN 60715)					
Protection class	IP20					
Installation position	any					
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16					
Operation temperature range	-25 °C ... +60 °C					
Storage temperature range	-40 °C ... +80 °C					
Dimensions (w × h × d)	17.5 × 93.0 × 75.0 mm					
Weight	0.059 kg/piece					
Approvals	cULus (E135145), DNV GL					
Standards	EN 60947-5-1					
Failure Rate Prediction (MTBF)						
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500					
Failure rate at +45 °C	724 fit					
Failure rate at +45 °C	1381278 h					
1 fit equals one failure per 10 ⁹ component hours						
The indicated temperature is the mean component ambient temperature.						
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year					

* S Article from stock
A Available with a lead time
R Available on request

Interface Technology · LCIS analog/analog converter


Input: 0–10 V / 0–20 mA / 4–20 mA

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 4 kV, 3-way isolation, Wide range input



Dimensions



PIN assignment



Range adjustment

S1	Input
● → Switch On	1 2 3 4
0–10V*	●
0–20mA	●
4–20mA	●●

S1	Output
● → Switch On	5 6
0–10V*	●
0–20mA	●
4–20mA	●●

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24–240 V	750510.0000 R*	LCIS-WP-WAA-0510-175-S
Push-In			
Rated voltage U_N	AC/DC 24–240 V	751510.0000 S*	LCIS-WP-WAA-1510-175-PI
Input	750510.0000	751510.0000	
Input signal	0–10 V, 0–20 mA, 4–20 mA, adjustable via DIP switch S1		
Input resistance	>300 kΩ @ 0–10 V, <100 Ω @ 0–20 mA, 4–20 mA		
Galvanic isolation I/O	3-way isolation		
Zero / Span	Production comparison		
Output			
Output signal	0–10 V, 0–20 mA, 4–20 mA adjustable via switch		
Max. load impedance at I-output	500 Ω @ 0–20 mA, 4–20 mA		
Min. load impedance at U-output	2 kΩ @ 0–10 V		
Output current	max. 5 mA @ 0–10 V		
Output voltage	< 18 V @ 0–20 mA, 4–20 mA		
Residual ripple	<20 mVeff		
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	0.05 % FSR		
Build-up time (Accuracy 1%)	17 ms		
Critical frequency	30 Hz @ 3 dB		
Temperature coefficient	<150 ppm / K FSR		
General			
Rated voltage U_N	AC/DC 24–240 V		
Operation voltage range	AC 19.2–264 V / DC 18.0–264 V		
Status indication	LED green		
Input/output protection	Overvoltage, current input with PTC fuse, short circuit-proof output		
Rise time (10 – 90%)	6 ms		
Insulation voltage input / output	4.0 kVeff		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	16
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +80 °C		
Dimensions (w × h × d)	17.5 × 93.0 × 73.0 mm		
Weight	0.059 kg/piece		
Approvals	cULus (E135145), DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	667 fit		
Failure rate at +45 °C	1498305 h		
1 fit equals one failure per 10 ⁹ component hours			
The indicated temperature is the mean component ambient temperature.			
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

Interface Technology · LCIS analog/analog converter


Input: 0–10 V / 0–20 mA / 4–20 mA

Output: 0–10 kHz


Insulation: 4 kV, 3-way isolation, Wide range input



Dimensions



PIN assignment



Range adjustment

S1	Input	1 2 3 4
● → Switch On	1 2 3 4	
0–10 V*		●
0–20 mA		●
4–20 mA		● ●

S1	Output	5 6
● → Switch On		
0–50 Hz*		●
0–100 Hz		●
0–1000 Hz		● ●
0–10000 Hz		● ● ●

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24–240 V	750512.0000 R*	LCIS-WP-WAF-0512-175-S
Push-In			
Rated voltage U_N	AC/DC 24–240 V	751512.0000 R*	LCIS-WP-WAF-1512-175-PI
Input	750512.0000	751512.0000	
Input signal	0–10 V, 0–20 mA, 4–20 mA, adjustable via DIP switch S1		
Input resistance	>300 kΩ @ 0–10 V, <100 Ω @ 0–20 mA, 4–20 mA		
Galvanic isolation I/O		3-way isolation	
Zero /Span		Production comparison	
Output			
Output signal	0–50 Hz, 0–100 Hz, 0–1 kHz, 0–10 kHz adjustable via DIP switch S1		
Residual ripple		—	
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	0.05 % FSR		
Build-up time (Accuracy 1%)	frequency-dependent		
Critical frequency	30 Hz @ 3 dB		
Temperature coefficient	<150 ppm / K FSR		
Transmission frequency	frequency-dependent		
General			
Rated voltage U_N	AC/DC 24–240 V		
Operation voltage range	AC 19.2–264 V / DC 18.0–264 V		
Status indication	LED green		
Input/output protection	Overvoltage, current input with PTC fuse, short circuit-proof output		
Rise time (10 - 90%)	frequency-dependent		
Insulation voltage input / output	4.0 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +80 °C		
Dimensions (w × h × d)	6.2 × 93.0 × 73.0 mm		
Weight	0.058 kg/piece		
Approvals	cULus (E135145), DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	724 fit		
Failure rate at +45 °C	1381278 h		
1 fit equals one failure per 10 ⁹ component hours			
The indicated temperature is the mean component ambient temperature.			
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

Interface Technology · LCIS analog/analog converter


Input: 16 selectable ranges

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2.5 kV / 4 kV, 3-way isolation, Wide range input



Dimensions



PIN assignment



Range adjustment

S1	Input	1	2	3	4
●→Switch On					
0–60 mV					
0–100 mV	●				
0–300 mV	●	●			
0–500 mV	●	●	●		
0–1 V	●				
0–2 V	●				
0–5 V	●	●	●		
0–10 V*	●	●	●	●	
2–10 V					
0–20 V	●				
0–5 mA	●	●	●		
0–10 mA	●	●	●		
±5 mA	●	●	●		
±20 mA	●	●	●		
0–20 mA	●	●	●		
4–20 mA	●	●	●		

S1	Output	5	6
●→Switch On			
0–10 V*	●		
0–20 mA	●		
4–20 mA	●	●	


Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24 V 750516.0000	R* LCIS-WUAA-0516-175-S	1
	AC/DC 24–240 V 750517.0000	R* LCIS-WP-WUAA-0517-175-S	1
Push-In			
Rated voltage U_N	AC/DC 24 V 751516.0000	S* LCIS-WUAA-1516-175-PI	1
	AC/DC 24–240 V 751517.0000	S* LCIS-WP-WUAA-1517-175-PI	1
Input	AC/DC 24 V	AC/DC 24–240 V	
Input signal	0–60, 0–100, 0–300, 0–500 mV adjustable via DIP switch S1 0–1, 0–2, 0–5, 0–10, 0–20, 2–10 V adjustable via DIP switch S1 0–5, 0–10, 0–20, 4–20, ±5, ±20 mA adjustable via DIP switch S1		
Input resistance	>300 kΩ @ mV, V, <100 Ω @ mA		
Galvanic isolation I/O	3-way isolation		
Zero /Span	Production comparison		
Output			
Output signal	0–10 V, 0–20 mA, 4–20 mA, adjustable via switch		
Max. load impedance at I-output	500 Ω @ 0–20 mA, 4–20 mA		
Min. load impedance at U-output	2 kΩ @ 0–10 V		
Output current	max. 5 mA @ 0–10 V		
Output voltage	< 18 V @ 0–20 mA, 4–20 mA		
Residual ripple	<20 mVeff		
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	0.05 % FSR		
Build-up time (Accuracy 1%)	17 ms		
Critical frequency	30 Hz @ 3 dB		
Temperature coefficient	<150 ppm / K FSR		
General	AC/DC 24 V	AC/DC 24–240 V	
Operation voltage range	AC 19.2–26.4 V / DC 18.0–31.2 V	AC 19.2–264 V / DC 18.0–264 V	
Status indication	LED green		
Input/output protection	Overvoltage, current input with PTC fuse, short circuit-proof output		
Rise time (10 – 90%)	6 ms		
Insulation voltage input / output	2.5 kVeff	4.0 kVeff	
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +80 °C		
Dimensions (w × h × d)	17.5 × 93.0 × 73.0 mm		
Weight	0.059 kg/piece		
Approvals	cULus (E135145), DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	681 fit		
Failure rate at +45 °C	1468511 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

Interface Technology · LCIS potentiometer/analog converter

Input: 0–1 kΩ / 0–6 kΩ

Output: 0–10 V / 0–20 mA / 4–20 mA

Insulation: 2.5 kV, 3-way isolation

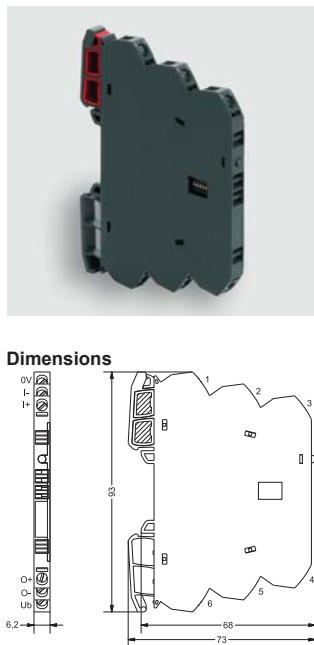

PIN assignment	
I+	3
Pot.	2
I-	6
Output	
O+	4
Ub	5
O-	1
0V Power	0
Range adjustment	
S1	Output
● → Switch On	5 6
0–10V	●
0–20mA	●
4–20mA	●●

S1	Input
● → Switch On	1 2 3 4
0–6 kΩ	
0–1 kΩ	●

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24 V	750557.0000 R*	LCIS-WRA-0557-62-S
Push-In			
Rated voltage U_N	AC/DC 24 V	751557.0000 S*	LCIS-WRA-1557-62-PI
Input	750557.0000	751557.0000	
Input variable	Poti 0–1 kΩ, Poti 0–6 kΩ		
Galvanic isolation I/O	3-way isolation		
Measuring procedure	2-wire, constant current		
Zero /Span	Production comparison		
Input resistance	>1 MΩ		
Parameterisation	DIP switch S1		
Sensor current	0.45 mA @ 0–1 kΩ / 0.15 mA @ 0–6 kΩ		
Protection device Input	Overshoot protection		
Output			
Output signal	0–10 V, 0–20 mA, 4–20 mA		
Max. load impedance at I-output	500 Ω		
Min. load impedance at U-output	2 kΩ		
Load deviation	at U-output max. 5 mV @ 2 kΩ		
Output voltage	< 16 V @ 0–20 mA, 4–20 mA		
Output current	max. 5 mA @ 10 V		
Residual ripple	<20 mVeff,eff		
Parameterisation	DIP switch S1		
Protection device	short circuit protection		
Operating data			
Accuracy	0.3 % FSR @ 23 °C		
Linearity error	0.1 % FSR		
Build-up time (Accuracy 1%)	approx. 60 ms @ 23 °C		
Critical frequency	10 Hz @ 3 dB / 23 °C		
Temperature coefficient	150 ppm / K FSR		
General			
Operation voltage range	AC 19.2–26.4 V / DC 18.0–31.2 V		
Rated voltage U_N	AC/DC 24 V		
Rated current	approx. 22 mA @ AC 24 V / approx. 13 mA @ DC 24 V		
Status indication	LED green		
Insulation voltage input / output	2.5 kVeff		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² /mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² /mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	16
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 93.0 × 73.0 mm		
Weight	0.030 kg/piece		
Approvals	cULus in preparation, DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	566 fit		
Failure rate at +45 °C	1765795 h		
1 fit equals one failure per 10 ⁹ component hours			
The indicated temperature is the mean component ambient temperature.			
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

Interface Technology · LCIS analog/analog converter


Output: 0–60 mV

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

S1	Output
→ Switch On	5 6
0–10V	●
0–20mA	●
4–20mA	●●

S1	Input
→ Switch On	1 2 3 4
0–60 mV	

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24 V	750901.0000 R*	LCIS-WAA-0901-62-S
Push-In			
Rated voltage U_N	AC/DC 24 V	751901.0000 S*	LCIS-WAA-1901-62-PI
Input	750901.0000	751901.0000	
Input variable		Voltage 0–60 mV	
Galvanic isolation I/O		3-way isolation	
Measuring procedure		Voltage measurement	
Zero / Span		Production comparison	
Input resistance		>1 MΩ	
Parameterisation		DIP switch S1	
Sensor current		–	
Protection device Input		Overshoot protection	
Output			
Output signal		0–10 V, 0–20 mA, 4–20 mA	
Max. load impedance at I-output		500 Ω	
Min. load impedance at U-output		2 kΩ	
Load deviation		at U-output max. 5 mV @ 2 kΩ	
Output voltage		< 16 V @ 0–20 mA, 4–20 mA	
Output current		max. 5 mA @ 10 V	
Residual ripple		<20 mVeff	
Parameterisation		DIP switch S1	
Protection device		short circuit protection	
Operating data			
Accuracy		0.1 % FSR @ 23 °C	
Linearity error		0.1 % FSR	
Build-up time (Accuracy 1%)		approx. 60 ms @ 23 °C	
Critical frequency		10 Hz @ 3 dB / 23 °C	
Temperature coefficient		150 ppm / K FSR	
General			
Operation voltage range		AC 19.2–26.4 V / DC 18.0–31.2 V	
Rated voltage U_N		AC/DC 24 V	
Rated current		approx. 22 mA @ AC 24 V / approx. 13 mA @ DC 24 V	
Status indication		LED green	
Insulation voltage input / output		2.5 kVeff	
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)	
Color of the housing		RAL 7012 basalt grey	
Mounting		DIN rail mountable TS35 (EN 60715)	
Protection class		IP20	
Installation position		any	
Connection type		Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16
Operation temperature range		-25 °C ... +60 °C	
Storage temperature range		-40 °C ... +85 °C	
Dimensions (w × h × d)		6.2 × 93.0 × 73.0 mm	
Weight		0.030 kg/piece	
Approvals		cULus in preparation, DNV GL	
Standards		EN 60947-5-1	
Failure Rate Prediction (MTBF)			
Standards		Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500	
Failure rate at +45 °C		566 fit	
Failure rate at +45 °C		1765795 h	
		1 fit equals one failure per 10 ⁹ component hours	
Comments		The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year	

Interface Technology · LCIS temperature/analog converter


Input: PT100, 2-wire

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



S1	Output
● → Switch On	5 6
0–10V	●
0–20mA	●
4–20mA	●●



S1 **Input**

S1	Input	1	2	3	4
● → Switch On	1 2 3 4				
-50 – 50°C					
-50 – 100°C		●			
-50 – 150°C		●	●		
0 – 100°C		●	●		
0 – 150°C				●	
0 – 200°C		●	●	●	
0 – 300°C		●	●	●	
0 – 400°C		●	●	●	●

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24 V	750809.0000 R*	LCIS-WPT2LA-0809-62-S
Push-In			
Rated voltage U_N	AC/DC 24 V	751809.0000 S*	LCIS-WPT2LA-1809-62-PI
Input	750809.0000	751809.0000	
Input variable		Temperature sensor PT100	
Galvanic isolation I/O		3-way isolation	
Measuring procedure		2-wire, constant current	
Zero /Span		Production comparison	
Input resistance		>1 MΩ	
Parameterisation		DIP switch S1	
Temperature range		-50 °C–50 °C / -50 °C–100 °C / -50 °C–150 °C / 0 °C–100 °C / 0 °C–150 °C / 0 °C–200 °C / 0 °C–300 °C / 0 °C–400 °C	
Sensor current		0.5 mA	
Protection device Input		Overtoltage protection	
Output			
Output signal		0–10 V, 0–20 mA, 4–20 mA	
Max. load impedance at I-output		500 Ω	
Min. load impedance at U-output		2 kΩ	
Load deviation		at U-output max. 5 mV @ 2 kΩ	
Output voltage		< 16 V @ 0–20 mA, 4–20 mA	
Output current		max. 5 mA @ 10 V	
Residual ripple		<20 mVeff	
Parameterisation		DIP switch S1	
Protection device		short circuit protection	
Operating data			
Accuracy		0.3 % FSR @ 23 °C	
Linearity error		0.1 % FSR	
Build-up time (Accuracy 1%)		approx. 60 ms @ 23 °C	
Critical frequency		10 Hz @ 3 dB / 23 °C	
Temperature coefficient		150 ppm / K FSR	
Error coefficient of measuring line		2.7 K/Ω	
General			
Operation voltage range		AC 19.2–26.4 V / DC 18.0–31.2 V	
Rated voltage U_N		AC/DC 24 V	
Rated current		approx. 22 mA @ AC 24 V / approx. 13 mA @ DC 24 V	
Status indication		LED green	
Insulation voltage input / output		2.5 kVeff	
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)	
Color of the housing		RAL 7012 basalt grey	
Mounting		DIN rail mountable TS35 (EN 60715)	
Protection class		IP20	
Installation position		any	
Connection type		Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16
Operation temperature range		-25 °C ... +60 °C	
Storage temperature range		-40 °C ... +85 °C	
Dimensions (w × h × d)		6.2 × 93.0 × 73.0 mm	
Weight		0.030 kg/piece	
Approvals		cULus in preparation, DNV GL	
Standards		EN 60947-5-1	
Failure Rate Prediction (MTBF)			
Standards		Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500	
Failure rate at +45 °C		566 fit	
Failure rate at +45 °C		1765795 h	
		1 fit equals one failure per 10 ⁹ component hours	
Comments		The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year	

Interface Technology · LCIS temperature/analog converter

Input: PT100, 2-wire/3-wire
Output: 0–10 V / 0–20 mA / 4–20 mA
Insulation: 2.5 kV, 2-way isolation



Range adjustment

S1	Output
● → Switch On	5 6
0–10V	●
0–20mA	●
4–20mA	● ●

S1

Input	1	2	3	4
PT100, 3-wire				
PT100, 2-wire	●			
-50 – 50°C				
-50 – 100°C	●			
-50 – 150°C	●	●		
0 – 100°C	●	●		
0 – 150°C	●	●		
0 – 200°C	●	●		
0 – 300°C	●	●		
0 – 400°C	●	●	●	

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U _N	AC/DC 24 V	750819.0000 R*	LCIS-WPT3LA-0819-62-S
Push-In			
Rated voltage U _N	AC/DC 24 V	751819.0000 S*	LCIS-WPT3LA-1819-62-PI
Input	750819.0000	751819.0000	
Input variable		Temperature sensor PT100	
Galvanic isolation I/O		2-way isolation	
Measuring procedure		2-wire or 3-wire, constant current	
Zero / Span		Production comparison	
Input resistance		>1 MΩ @ 2-wire, >500 kΩ @ 3-wire	
Parameterisation		DIP switch S1	
Temperature range	-50 °C–50 °C / -50 °C–100 °C / -50 °C–150 °C / 0 °C–100 °C / 0 °C–150 °C / 0 °C–200 °C / 0 °C–300 °C / 0 °C–400 °C		
Sensor current		0.5 mA	
Protection device Input		Overshoot protection	
Output			
Output signal		0–10 V, 0–20 mA, 4–20 mA	
Max. load impedance at I-output		500 Ω	
Min. load impedance at U-output		2 kΩ	
Load deviation		at U-output max. 5 mV @ 2 kΩ	
Output voltage		< 16 V @ 0–20 mA, 4–20 mA	
Output current		max. 5 mA @ 10 V	
Residual ripple		<20 mVeff _{eff}	
Parameterisation		DIP switch S1	
Protection device		short circuit protection	
Operating data			
Accuracy		0.3 % FSR @ 23 °C	
Linearity error		0.1 % FSR	
Build-up time (Accuracy 1%)		approx. 60 ms @ 23 °C	
Critical frequency		10 Hz @ 3 dB / 23 °C	
Temperature coefficient		150 ppm / K FSR	
Error coefficient of measuring line		2-conductor: 2.7 K/Ω, 3-conductor: 0.1 K + 0.1 %/Ω	
General			
Operation voltage range		AC 19.2–26.4 V / DC 18.0–31.2 V	
Rated voltage U _N		AC/DC 24 V	
Rated current		approx. 22 mA @ AC 24 V / approx. 13 mA @ DC 24 V	
Status indication		LED green	
Insulation voltage input / output		2.5 kV _{eff}	
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)	
Color of the housing		RAL 7012 basalt grey	
Mounting		DIN rail mountable TS35 (EN 60715)	
Protection class		IP20	
Installation position		any	
Connection type		Screwed terminal single wire 0.25 mm ² –2.5 mm ² / Push-In single wire 0.25 mm ² –2.5 mm ² / mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² AWG 20–16 AWG 20–16 AWG 20–16	
Operation temperature range		-25 °C ... +60 °C	
Storage temperature range		-40 °C ... +85 °C	
Dimensions (w × h × d)		6.2 × 93.0 × 73.0 mm	
Weight		0.030 kg/piece	
Approvals		cULus in preparation, DNV GL	
Standards		EN 60947-5-1	
Failure Rate Prediction (MTBF)			
Standards		Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500	
Failure rate at +45 °C		578 fit	
Failure rate at +45 °C		1729323 h	
		1 fit equals one failure per 10 ⁹ component hours	
Comments		The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year	

Interface Technology · LCIS temperature/analog converter


Input: PT100, 2-wire/3-wire

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 4.0 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

S1	Input	Output
● → Switch On	5 6	
0–10V	●	
0–20mA	●	
4–20mA	● ●	

S1	Input	Output
● → Switch On	1 2 3 4	
PT100, 3-wire		
PT100, 2-wire	●	
-50 – 50°C		
-50 – 100°C	●	
-50 – 150°C	●	
0 – 100°C	● ●	
0 – 150°C		●
0 – 200°C	● ●	
0 – 300°C	● ●	
0 – 400°C	● ● ●	

Description	Part-No.	Type	PU	
Screw terminal				
Rated voltage U_N	AC/DC 24–240 V	750817.0000 R*	LCIS-WP-WPT3LA-0817-175-S	1
Push-In				
Rated voltage U_N	AC/DC 24–240 V	751817.0000 S*	LCIS-WP-WPT3LA-1817-175-PI	1
Input	750817.0000	751817.0000		
Input variable	Temperature sensor PT100			
Galvanic isolation I/O	3-way isolation			
Measuring procedure	2-wire or 3-wire, constant current			
Zero /Span	Production comparison			
Input resistance	>1 MΩ @ 2-wire, >500 kΩ @ 3-wire			
Parameterisation	DIP switch S1			
Temperature range	-50 °C–50 °C / -50 °C–100 °C / -50 °C–150 °C / 0 °C–100 °C / 0 °C–150 °C / 0 °C–200 °C / 0 °C–300 °C / 0 °C–400 °C			
Sensor current	0.5 mA			
Protection device Input	Overshoot protection			
Output				
Output signal	0–10 V, 0–20 mA, 4–20 mA			
Max. load impedance at I-output	500 Ω			
Min. load impedance at U-output	2 kΩ			
Load deviation	at U-output max. 5 mV @ 2 kΩ			
Output voltage	< 18 V @ 0–20 mA, 4–20 mA			
Output current	max. 5 mA @ 10 V			
Residual ripple	<20 mVeff			
Parameterisation	DIP switch S1			
Protection device	short circuit protection			
Operating data				
Accuracy	0.3 % FSR @ 23 °C			
Linearity error	0.1 % FSR			
Build-up time (Accuracy 1%)	approx. 60 ms @ 23 °C			
Critical frequency	10 Hz @ 3 dB / 23 °C			
Temperature coefficient	150 ppm / K FSR			
Error coefficient of measuring line	2-conductor: 2.7 K/Ω, 3-conductor: 0.1 K + 0.1 %/Ω			
General				
Operation voltage range	AC 19.2–264 V / DC 18.0–264 V			
Rated voltage U_N	AC/DC 24–240 V			
Rated current	appr. 22 mA @ AC 24 V / appr. 19 mA @ DC 24 V			
Status indication	LED green			
Insulation voltage input / output	4.0 kVeff			
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)			
Color of the housing	RAL 7012 basalt grey			
Mounting	DIN rail mountable TS35 (EN 60715)			
Protection class	IP20			
Installation position	any			
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16		
Operation temperature range	-25 °C ... +60 °C			
Storage temperature range	-40 °C ... +85 °C			
Dimensions (w × h × d)	17.5 × 93.0 × 73.0 mm			
Weight	0.059 kg/piece			
Approvals	cULus in preparation, DNV GL			
Standards	EN 60947-5-1			
Failure Rate Prediction (MTBF)				
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500			
Failure rate at +45 °C	713 fit			
Failure rate at +45 °C	1402367 h			
	1 fit equals one failure per 10 ⁹ component hours			
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year			

* S Article from stock
A Available with a lead time
R Available on request

Interface Technology · LCIS temperature/analog converter


Input: Thermal elements J, K

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

S1	Output	5 6
→ Switch On		
0–10V	●	
0–20mA	●	
4–20mA	●●	

S1	Input	1 2 3 4
→ Switch On		
TC J (Fe-CuNi)	●	
TC K (Ni-CrNi)	●	
-50 – 200°C		
-50 – 350°C	●	
0 – 200°C		●
0 – 400°C	●	●
0 – 600°C		●
0 – 800°C	●	●
0 – 1000°C		●●
0 – 1200°C	●●●	●

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	AC/DC 24 V	750839.0000 R* LCIS-WTCA-0839-62-S	1
Push-In			
Rated voltage U_N	AC/DC 24 V	751839.0000 S* LCIS-WTCA-1839-62-PI	1
Input	750839.0000	751839.0000	
Input variable	Thermo voltage, element J or K (DIN/IEC 584-1)		
Galvanic isolation I/O	3-way isolation		
Measuring procedure	Voltage measurement		
Zero /Span	Production comparison		
Input resistance	>1 MΩ		
Parameterisation	DIP switch S1		
Temperature range	-50 °C–200 °C / -50 °C–350 °C / 0 °C–200 °C / 0 °C–400 °C / 0 °C–600 °C / 0 °C–800 °C / 0 °C–1000 °C / 0 °C–1200 °C		
Cold junction compensation	throughout the entire temperature range		
Protection device Input	Overshoot protection		
Output			
Output signal	0–10 V, 0–20 mA, 4–20 mA		
Max. load impedance at I-output	500 Ω		
Min. load impedance at U-output	2 kΩ		
Load deviation	at U-output max. 5 mV @ 2 kΩ		
Output voltage	< 16 V @ 0–20 mA, 4–20 mA		
Output current	max. 5 mA @ 10 V		
Residual ripple	<20 mVeff		
Parameterisation	DIP switch S1		
Protection device	short circuit protection		
Operating data			
Accuracy	0.5 % + 2K FSR @ 23 °C		
Linearity error	0.1 % FSR, temperature linear		
Build-up time (Accuracy 1%)	approx. 60 ms @ 23 °C		
Critical frequency	10 Hz @ 3 dB / 23 °C		
Temperature coefficient	150 ppm / K FSR		
Transmission frequency	–		
General			
Operation voltage range	AC 19.2–26.4 V / DC 18.0–31.2 V		
Rated voltage U_N	AC/DC 24 V		
Rated current	approx. 22 mA @ AC 24 V / approx. 13 mA @ DC 24 V		
Status indication	LED green		
Insulation voltage input / output	2.5 kVeff		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 93.0 × 73.0 mm		
Weight	0.030 kg/piece		
Approvals	cULus in preparation, DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	566 fit		
Failure rate at +45 °C	1765795 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

* S Article from stock
A Available with a lead time
R Available on request

Interface Technology · LCIS temperature/analog converter


Input: Thermal elements J, K

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 4.0 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

S1	Output
● → Switch On	5 6
0–10V	●
0–20mA	●
4–20mA	●●

S1 Input

S1	Input	Switch On	1	2	3	4
TC J (Fe-CuNi)						
TC K (Ni-CrNi)		●				
-50 – 200°C						
-50 – 350°C		●				
0 – 200°C			●			
0 – 400°C		●	●			
0 – 600°C			●			
0 – 800°C		●	●			
0 – 1000°C			●	●		
0 – 1200°C		●	●	●		

Description	Part-No.	Type	PU	
Screw terminal				
Rated voltage U _N	AC/DC 24–240 V	750847.0000 R*	LCIS-WP-WTCA-0847-175-S	1
Push-In				
Rated voltage U _N	AC/DC 24–240 V	751847.0000 S*	LCIS-WP-WTCA-1847-175-PI	1
Input	750847.0000	751847.0000		
Input variable	Thermo voltage, element J or K (DIN/IEC 584-1)			
Galvanic isolation I/O	3-way isolation			
Measuring procedure	Voltage measurement			
Zero /Span	Production comparison			
Input resistance	>1 MΩ			
Parameterisation	DIP switch S1			
Temperature range	-50 °C–200 °C / -50 °C–350 °C / 0 °C–200 °C / 0 °C–400 °C / 0 °C–600 °C / 0 °C–800 °C / 0 °C–1000 °C / 0 °C–1200 °C			
Cold junction compensation	throughout the entire temperature range			
Protection device Input	Overshoot protection			
Output				
Output signal	0–10 V, 0–20 mA, 4–20 mA			
Max. load impedance at I-output	500 Ω			
Min. load impedance at U-output	2 kΩ			
Load deviation	at U-output max. 5 mV @ 2 kΩ			
Output voltage	< 18 V @ 0–20 mA, 4–20 mA			
Output current	max. 5 mA @ 10 V			
Residual ripple	<20 mVeff			
Parameterisation	DIP switch S1			
Protection device	short circuit protection			
Operating data				
Accuracy	0.5 % + 2K FSR @ 23 °C			
Linearity error	0.1 % FSR, temperature linear			
Build-up time (Accuracy 1%)	approx. 60 ms @ 23 °C			
Critical frequency	10 Hz @ 3 dB / 23 °C			
Temperature coefficient	150 ppm / K FSR			
Transmission frequency	–			
General				
Operation voltage range	AC 19.2–264 V / DC 18.0–264 V			
Rated voltage U _N	AC/DC 24–240 V			
Rated current	appr. 22 mA @ AC 24 V / appr. 19 mA @ DC 24 V			
Status indication	LED green			
Insulation voltage input / output	4.0 kVeff			
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)			
Color of the housing	RAL 7012 basalt grey			
Mounting	DIN rail mountable TS35 (EN 60715)			
Protection class	IP20			
Installation position	any			
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16		
Operation temperature range	-25 °C ... +60 °C			
Storage temperature range	-40 °C ... +85 °C			
Dimensions (w × h × d)	17.5 × 93.0 × 73.0 mm			
Weight	0.059 kg/piece			
Approvals	cULus in preparation, DNV GL			
Standards	EN 60947-5-1			
Failure Rate Prediction (MTBF)				
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500			
Failure rate at +45 °C	700 fit			
Failure rate at +45 °C	1428555 h			
	1 fit equals one failure per 10 ⁹ component hours			
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year			

* S Article from stock
A Available with a lead time
R Available on request

Interface Technology · LCIS temperature/analog converter


Input: Thermal elements J, K

Output: 0–10 V / 0–20 mA / 4–20 mA


Insulation: 4.0 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

S1	Output	5 6
→ Switch On		
0–10V	●	
0–20mA	●	
4–20mA	●●	

S1	Input	1 2 3 4
→ Switch On		
TC J (Fe-CuNi)	●	
TC K (Ni-CrNi)	●	
J: -50 – 150°C		
K: -210 – 105°C		
-50 – 250°C	●	
-50 – 350°C	●●	
0 – 400°C	●●	
0 – 600°C		●
0 – 800°C	●	●
0 – 1000°C	●●	●
0 – 1200°C	●●●	●

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U _N	AC/DC 24–240 V	750848.0000 R*	LCIS-WP-WTCA-0848-175-S
Push-In			
Rated voltage U _N	AC/DC 24–240 V	751848.0000 S*	LCIS-WP-WTCA-1848-175-PI
Input	750848.0000	751848.0000	
Input variable	Thermo voltage, element J or K (DIN/IEC 584-1)		
Galvanic isolation I/O	3-way isolation		
Measuring procedure	Voltage measurement		
Zero /Span	Production comparison		
Input resistance	>1 MΩ		
Parameterisation	DIP switch S1		
Temperature range	J: -50 °C–150 °C / -50 °C–250 °C / -50 °C–350 °C / 0 °C–400 °C / 0 °C–600 °C / 0 °C–800 °C / 0 °C–1000 °C / 0 °C–1200 °C K: -210 °C–105 °C / -50 °C–250 °C / -50 °C–350 °C / 0 °C–400 °C / 0 °C–600 °C / 0 °C–800 °C / 0 °C–1000 °C / 0 °C–1200 °C		
Cold junction compensation	throughout the entire temperature range		
Protection device Input	Overvoltage protection		
Output			
Output signal	0–10 V, 0–20 mA, 4–20 mA		
Max. load impedance at I-output	500 Ω		
Min. load impedance at U-output	2 kΩ		
Load deviation	at U-output max. 5 mV @ 2 kΩ		
Output voltage	< 18 V @ 0–20 mA, 4–20 mA		
Output current	max. 5 mA @ 10 V		
Residual ripple	<20 mVeff _{eff}		
Parameterisation	DIP switch S1		
Protection device	short circuit protection		
Operating data			
Accuracy	0.5 % + 2K FSR @ 23 °C		
Linearity error	0.1 % FSR, temperature linear		
Build-up time (Accuracy 1%)	approx. 60 ms @ 23 °C		
Critical frequency	10 Hz @ 3 dB / 23 °C		
Temperature coefficient	150 ppm / K FSR		
Transmission frequency	–		
General			
Operation voltage range	AC 19.2–264 V / DC 18.0–264 V		
Rated voltage U _N	AC/DC 24–240 V		
Rated current	appr. 22 mA @ AC 24 V / appr. 19 mA @ DC 24 V		
Status indication	LED green		
Insulation voltage input / output	4.0 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)		
Color of the housing	RAL 7012 basalt grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Connection type	Screwed terminal single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	Push-In single wire 0.25 mm ² –2.5 mm ² / AWG 20–14 fine stranded wire with ferrule 0.25 mm ² –1.5 mm ² / AWG 20–16	
Operation temperature range	-25 °C ... +60 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	17.5 × 93.0 × 73.0 mm		
Weight	0.059 kg/piece		
Approvals	cULus in preparation, DNV GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	700 fit		
Failure rate at +45 °C	1428555 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		

* S Article from stock
A Available with a lead time
R Available on request

Interface Technology · Microcompact current/analog converter

Input: AC/DC 0 – 1 A

Output: 0 – 10 V / 0 – 20 mA / 4 – 20 mA - adjustable

Insulation: 2.5 kV, 3-way isolation



	Description	Part-No.	Type	PU			
	Screw terminal	DC 24 V	750540 S*	WAA 7-0540			
	Spring terminal			1			
	Input	750540					
	Input variable	Single analog signal					
	Input signal	AC/DC 0–1 A, ± 1 A					
	Galvanic isolation I/O	3-way isolation					
	Input resistance	typ. 0.06 Ω					
	Output						
	Output variable	0 – 10 V, 0 – 20 mA, 4 – 20 mA					
	Output signal	adjustable via DIP switch S1					
	Max. load impedance at I-output	400 Ω					
	Output current	max. 21 mA					
	Residual ripple	<5 mVeff					
	Operating data						
	Accuracy	0.5 % FSR @ 23 °C					
	Linearity error	0.1 % FSR @ 23 °C					
	Build-up time (Accuracy 1%)	150 ms					
	General						
	Rated voltage U _N	DC 24 V					
	Operation voltage range	DC 16.8–30 V					
	Status indication	LED yellow					
	Insulation voltage input / output	2.5 kV _{eff}					
	Housing material	PA 6.6 (UL 94 V-0, NFF I2, F2)					
	Color of the housing	light grey					
	Mounting	DIN rail mountable TS35 (EN 60715)					
	Protection class	IP20					
	Installation position	any					
	Connection type	Screw terminal					
	Operation temperature range	-25 °C ... +60 °C					
	Storage temperature range	-40 °C ... +85 °C					
	Dimensions (w × h × d)	6.2 × 90.0 × 115.5 mm					
	Weight	0.055 kg/piece					
	Approvals	cULus, Cl.1 Div2, Gr. A, B, C, D, T4A					
	Failure Rate Prediction (MTBF)						
	Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500					
	Failure rate at +45 °C	639 fit					
	Failure rate at +45 °C	1564896 h					
	1 fit equals one failure per 10 ⁹ component hours						
	The indicated temperature is the mean component ambient temperature.						
	Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year					

Interface Technology · Microcompact current/analogue converter


Input: AC/DC 0 – 5 A

Output: 0 – 10 V / 0 – 20 mA / 4 – 20 mA - adjustable


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

● → Switch On		S1	
Input	Output	1 2 3 4	
0-5A	0-10V		
0-5A	0-20mA	●	
0-5A	4-20mA	●	

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	DC 24 V	750541 S*	WAA 7-0541
Spring terminal			
Rated voltage U_N	DC 24 V	751541 A*	WAA 7-1541
Input	750541	751541	
Input variable		Single analogue signal	
Input signal		AC/DC 0–5 A, ± 5 A	
Galvanic isolation I/O		3-way isolation	
Input resistance		typ. 0.02 Ω	
Output			
Output variable		0 – 10 V, 0 – 20 mA, 4 – 20 mA	
Output signal		adjustable via DIP switch S1	
Max. load impedance at I-output		400 Ω	
Output current		max. 21 mA	
Residual ripple		<5 mV V_{eff}	
Operating data			
Accuracy		0.5 % FSR @ 23 °C	
Linearity error		0.1 % FSR @ 23 °C	
Build-up time (Accuracy 1%)		150 ms	
General			
Rated voltage U_N		DC 24 V	
Operation voltage range		DC 16.8–30 V	
Status indication		LED yellow	
Insulation voltage input / output		2.5 kV V_{eff}	
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)	
Color of the housing		light grey	
Mounting		DIN rail mountable TS35 (EN 60715)	
Protection class		IP20	
Installation position		any	
Connection type	Screw terminal	Spring terminal	
Operation temperature range		-25 °C ... +60 °C	
Storage temperature range		-40 °C ... +85 °C	
Dimensions (w × h × d)		6.2 × 90.0 × 115.5 mm	
Weight		0.055 kg/piece	
Approvals		cULus, Cl.1 Div2, Gr. A, B, C, D, T4A	
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	639 fit		
Failure rate at +45 °C	1564896 h		
	1 fit equals one failure per 10^9 component hours		
	The indicated temperature is the mean component ambient temperature.		
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		


* **S** Article from stock
A Available with a lead time
R Available on request

Interface Technology · Microcompact current/analogue converter


Input: AC/DC 0 – 10 A

Output: 0 – 10 V / 0 – 20 mA / 4 – 20 mA - adjustable


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment



Range adjustment

● → Switch On		S1
Input	Output	1 2 3 4
0-10A	0-10V	
0-10A	0-20mA	●
0-10A	4-20mA	●

Description	Part-No.	Type	PU			
Screw terminal						
Rated voltage U_N	DC 24 V	750542 A*	WAA 7-0542			
Spring terminal						
Rated voltage U_N	DC 24 V	751542 S*	WAA 7-1542			
Input	750542	751542				
Input variable		Single analogue signal				
Input signal		AC/DC 0–10 A, + 10 A				
Galvanic isolation I/O		3-way isolation				
Input resistance		typ. 0.02 Ω				
Output						
Output variable		0 – 10 V, 0 – 20 mA, 4 – 20 mA				
Output signal		adjustable via DIP switch S1				
Max. load impedance at I-output		400 Ω				
Output current		max. 21 mA				
Residual ripple		<5 mVeff _{eff}				
Operating data						
Accuracy		0.5 % FSR @ 23 °C				
Linearity error		0.1 % FSR @ 23 °C				
Build-up time (Accuracy 1%)		150 ms				
General						
Rated voltage U_N		DC 24 V				
Operation voltage range		DC 16.8–30 V				
Status indication		LED yellow				
Insulation voltage input / output		2.5 kV _{eff}				
Housing material		PA 6.6 (UL 94 V-0, NFF I2, F2)				
Color of the housing		light grey				
Mounting		DIN rail mountable TS35 (EN 60715)				
Protection class		IP20				
Installation position		any				
Connection type	Screw terminal	Spring terminal				
Operation temperature range		-25 °C ... +60 °C				
Storage temperature range		-40 °C ... +85 °C				
Dimensions (w × h × d)		6.2 × 90.0 × 115.5 mm				
Weight		0.055 kg/piece				
Approvals		cULus, Cl.1 Div2, Gr. A, B, C, D, T4A				
Failure Rate Prediction (MTBF)						
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500					
Failure rate at +45 °C	643 fit					
Failure rate at +45 °C	1555162 h					
1 fit equals one failure per 10^9 component hours						
The indicated temperature is the mean component ambient temperature.						
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year					

Compact, flexible, safe: The new Microcompact Signal Converter of

Compact

Very narrow housing width of 6,2 mm

Wide temperature range

Extended temperature range of -25...+70°C for broad range of applications

Fast response time

Up to 1,5 ms response time for AC signal transmission

High load impedance

All current outputs are qualified for 700 Ohm loads!

Safety isolation

All devices offer "Safety isolation" with 2,5kV-isolation voltage acc. EN 61140

Easy installation

Jumper combs instead of wiring via complete isolated jumper connections simplify installation



new intelligent the LCON series



Advanced technology

The parametrization via FDT software is the leading technology for engineering, Management & Life Cycle Support in automation applications

Worldwide approvals - Class I Div 2

Worldwide approvals like UL and GL allow for use in global applications

Quality

LÜTZE signal converter offer UL 94-V0 and NFF 12, F2

Termination

Screw or spring termination available

Power bridging



Bridge each potential with isolated jumper bars

Interface Technology · Microcompact analog/analog converter

Input: $\pm 30 \text{ V}$, $\pm 50 \text{ mA}$, $\pm \text{DC } 5 \text{ A}$ adjustable

Output: $0\text{--}20 \text{ mA}$ / $4\text{--}20 \text{ mA}$ / $0\text{--}10 \text{ V}$ / $-10\text{--}10 \text{ V}$ / $2\text{--}10 \text{ V}$ / $0\text{--}5 \text{ V}$ / $1\text{--}5 \text{ V}$

Insulation: 2.5 kV , 3-way isolation

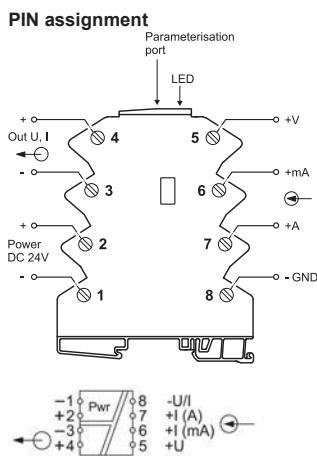

Range adjustment

S1 ● → Switch On		Range*				
		1	2	3	4	5
0-50mV	●				0-10mA	●
0-100mV	●				0-20mA	●
0-200mV	●				0-50mA	●
0-500mV	●				4-20mA	●
0-1V	●				0-0.5A	●
0-2V	●				0-1A	●
0-5V	●	●			0-2A	●
0-10V	●	●			0-5A	●
0-20V	●	●			±1V	●
0-30V	●	●			±5V	●
1-5V	●	●			±10V	●
2-10V	●	●			±5mA	●
0-1mA	●	●			±20mA	●
0-2mA	●	●			±2A	●
0-5mA	●	●			±5A	●

S1 1-8 off: FDT/DTM
*See instruction leaflet

Description	Part-No.	Type	PU
Screw terminal Rated voltage U_N	DC 24 V	750320 R*	LCON AA DFDT 806210
Spring terminal Rated voltage U_N	DC 24 V	751320 S*	LCON AA DFDT 806211
Input			
Measurement input	+30/-30 V, +50/-50 mA, DC +5 A/-5 A adjustable via switch and software FDT/DTM, connection via micro USB		
Galvanic isolation I/O	3-way isolation		
Step response (10–90%)	1.5 ms – 750 ms (adjustable by means of filter stage 1–5, default: filter stage 4 = 200 ms)		
Critical frequency	–		
Input resistance	>800 kΩ @ +30/-30 V, <30 Ω @ +50/-50 mA, 10 mΩ @ DC +5 A/-5 A		
Zero /Span	freely adjustable		
Output			
Output signal	0–10 V, -10–10 V, 0–20 mA, 4–20 mA adjustable via switch and software FDT/DTM, connection via USB service cable		
Max. load impedance at I-output	700 Ω @ 0–20 mA, 4–20 mA		
Min. load impedance at U-output	2 kΩ @ 0–10 V, -10–+10 V		
Load deviation	–		
Limitation for exceeding measurement range	10.25 V @ 0–10 V, -10–10 V 20.5 mA @ 0–20 mA, 4–20 mA		
max. modulation range/output signal/output current	10.5 V @ 0–10 V, -10–10 V 21 mA @ 0–20 mA, 4–20 mA		
Operating data			
Accuracy	0.1 % FSR @ +30/-30 V, +50/-50 mA 0.5 % FSR @ +5 A/-5 A		
Linearity error	±0.05 % FSR @ +30/-30 V, +50/-50 mA ±0.1 % FSR @ +5 A/-5 A		
General			
Rated voltage U_N	DC 24 V		
Operation voltage range	16.8–30 V		
Rated current	approx. 18 mA		
Status indication	LED green, red (error)		
Input/output protection	Oversupply DC 30 V, short circuit-proof output		
Connection type	Screw terminal 0.14 mm² – 1.5 mm² Spring terminal 0.14 mm² – 1.5 mm²		
Resolution	16-bit		
Temperature compensation internally	–		
Configuration	Switch and software: FDT / DTM		
Temperature error	<100 ppm/K FSR		
Data storage	Flash		
Insulation voltage input / output	2.5 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0)		
Color of the housing	light grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Operation temperature range	-40 °C ... +70 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 90.0 × 115.5 mm		
Weight	0.050 kg/piece		
Approvals	cULus (E135145), Cl.1 Div2, Gr. A, B, C, D, T4A, GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	607 fit		
Failure rate at +45 °C	1647753 h		
	1 fit equals one failure per 10^9 component hours		
Comments	The indicated temperature is the mean component ambient temperature.		
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances		
NOTE: The device can be configured using the DIP switches on the side or using the accessory LCON ZB service cable (Item no. 750894).			

Interface Technology · Microcompact temp./analog converter


Input: PT, thermocouple, potentiometer – adjustable temperature converter

Output: 0–20 mA / 4–20 mA / 0–10 V / -10–10 V / 2–10 V / 0–5 V / 1–5 V


Insulation: 2.5 kV, 3-way isolation



Dimensions



PIN assignment

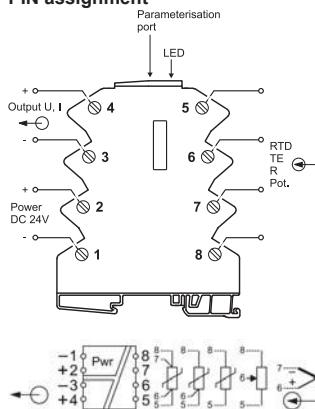

Range adjustment

Range*	S1	S2
Start	7 8 1 2	End 3 4 5 6 7 8
-200°C	● ●	0°C ● ●
-150°C	● ●	50°C ● ●
-100°C	● ●	100°C ● ●
-50°C	● ●	150°C ● ●
0°C	● ● ● ●	200°C ● ● ●
Sensor*	S1 1 2 3	250°C ● ● ●
PT100	● ●	300°C ● ● ●
Pt1000	● ●	350°C ● ● ●
TE J	● ●	400°C ● ● ●
TE K	● ●	450°C ● ● ●
Pot. %	● ● ● ●	500°C ● ● ●
		550°C ● ● ●
Output*	S1 1 2 3 4 5 6	600°C ● ● ●
0–20mA	● ●	650°C ● ● ●
4–20mA	● ●	700°C ● ● ●
0–10V	● ●	750°C ● ● ●
±10V	● ●	800°C ● ● ●
S1-S2 1-8 off:		850°C ● ● ●
FDT/DTM		900°C ● ● ●
*See instruction leaflet		950°C ● ● ●
		1000°C ● ● ●
		1050°C ● ● ●
		1100°C ● ● ●
		1150°C ● ● ●
		1200°C ● ● ●
		1250°C ● ● ●
		1300°C ● ● ●
		1350°C ● ● ●
		1400°C ● ● ●
	● → Switch On	

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	DC 24 V	750340 R*	LCON TA DFDT 806210
Spring terminal			
Rated voltage U_N	DC 24 V	751340 S*	LCON TA DFDT 806211
Input			
Measurement input		PT100, PT1000, resistencia, potenciómetro	
		Thermal elements: Type B, C, E, J, K, N, R, S, T	
		Customer-specific via support points, polynomial	
Galvanic isolation I/O		3-way isolation	
Temperature range	PT: -220 ... 850 °C depending on type	Thermal elements: -210 ... 2310 °C depending on type	
Step response (10–90%)	TE: 10 – 750 ms, PT: 5 – 750 ms (adjustable by means of filter stage 1–5, default: 200 ms – filter stage 4)		
Input resistance		Thermocouples: 1 MΩ	
Sensor current	PT, potentiometer, resistance: 0.002–0.6 mA depending on type		
Circuit	PT - 2, 3, 4-wire, for 2-wire with offset correction, no external bridges necessary, autom. detection		
Output			
Output signal	0–10 V, -10–10 V, 0–20 mA, 4–20 mA adjustable via switch and software FDT/DTM, connection via USB service cable		
Max. load impedance at I-output	700 Ω @ 0–20 mA, 4–20 mA		
Max. load impedance at U-output	>2 kΩ @ 0–10 V, -10–10 V		
Residual ripple	—		
Limitation for exceeding measurement range	10.25 V @ 0–10 V, -10–10 V		
max. modulation range/output signal/output current	20.5 mA @ 0–20 mA, 4–20 mA		
	10.5 V @ 0–10 V, -10–10 V		
	21 mA @ 0–20 mA, 4–20 mA		
Operating data			
Accuracy	PT: 10 K, dividido por el rango de medida configurado (K) + 0,2 % FSR Thermocouples: 10 K, divided by the set measurement range (K) + 0,4 % FSR	±0,1 % FSR	
Linearity error			
General			
Rated voltage U_N	DC 24 V		
Operation voltage range	16.8–30 V		
Rated current	approx. 18 mA		
Status indication	LED green, red (error)		
Input/output protection	Oversupply DC 30 V, short circuit-proof output		
Connection type	Screw terminal 0.14 mm ² – 1.5 mm ² Spring terminal 0.14 mm ² – 1.5 mm ²		
Resolution	16-bit		
Temperature compensation internally	Thermal elements: type ±1 K , max. ±2 K		
Configuration	Switch and software: FDT / DTM		
Temperature error	<100 ppm/K FSR		
Data storage	Flash		
Insulation voltage input / output	2.5 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0)		
Color of the housing	light grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Operation temperature range	-40 °C ... +70 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 90.0 × 115.5 mm		
Weight	0.050 kg/piece		
Approvals	cULus (E135145), Cl.1 Div2, Gr. A, B, C, D, T4A, GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	678 fit		
Failure rate at +45 °C	1474689 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature.		
	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances		
Comments			
NOTE: The device can be configured using the DIP switches on the side or using the accessory LCON ZB service cable (Item no. 750894).			


* **S** Article from stock
A Available with a lead time
R Available on request

Interface Technology · Microcompact analog/limit value switch



Input: ± 30 V, ± 50 mA, ± 5 A adjustable – adjustable limit value switch

Output: Semiconductor NO contact

Insulation: 2.5 kV, 2-way isolation



PIN assignment

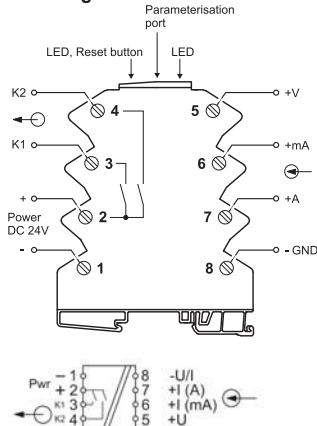

Description	Part-No.	Type	PU
Screw terminal Rated voltage U_N	DC 24 V	750360 R*	LCON ALS FDT 806210
Spring terminal Rated voltage U_N	DC 24 V	751360 S*	LCON ALS FDT 806211
Input			
Measurement input	+30/-30 V, +50/-50 mA, DC +5 A/-5 A adjustable via software FDT/DTM, connection via micro USB		
Galvanic isolation I/O		2-way isolation	
Step response (10–90%)	4 ms – 750 ms (adjustable by means of filter stage 1–5, default: filter stage 4 = 200 ms)		
Input resistance	>800 kΩ @ +30/-30 V, <30 Ω @ +50/-50 mA, 10 mΩ @ DC +5 A/-5 A		
Zero /Span	freely adjustable		
Output			
Output signal	+30/-30 V, +50/-50 mA, DC +5 A/-5 A, adjustable via software FDT / DTM, connection via USB service cable		
Contact type	K1,K2: Semiconductor, N/O contact		
Max. switching voltage	DC 30 V		
Max. switching current	DC 100 mA, not short circuit protected		
Status display output	LED yellow K1 and LED yellow K2		
Operating mode	Limit value, window, alarm output / additionally adjustable: Hysteresis, input / output put delay		
Operating data			
Accuracy	0.1 % FSR @ +30/-30 V, +50/-50 mA 0.5 % FSR @ +5 A/-5 A		
Linearity error	±0.05 % FSR @ +30/-30 V, +50/-50 mA ±0.1 % FSR @ +5 A/-5 A		
General			
Rated voltage U_N	DC 24 V		
Operation voltage range	16.8–30 V		
Rated current	approx. 12 mA		
Status indication	LED green, yellow (K1, K2), red (error)		
Input/output protection	Overtoltage DC 30 V		
Connection type	Screw terminal 0.14 mm ² – 1.5 mm ² Spring terminal 0.14 mm ² – 1.5 mm ²		
Resolution	16-bit		
Temperature compensation internally	–		
Configuration	Software: FDT / DTM		
Temperature error	<100 ppm/K FSR		
Data storage	Flash		
Insulation voltage input / output	2.5 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0)		
Color of the housing	light grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Operation temperature range	-40 °C ... +70 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 90.0 × 115.5 mm		
Weight	0.050 kg/piece		
Approvals	cULus (E135145), UL 94 V-0		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	435 fit		
Failure rate at +45 °C	2298502 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances		
Comments			
NOTE: The device can be configured using the DIP switches on the side or using the accessory LCON ZB service cable (Item no. 750894).			

Interface Technology · Microcompact temp./limit value switch


Input: PT, thermocouple, potentiometer – adjustable temperature converter

Output: Semiconductor NO contact


Insulation: 2.5 kV, 2-way isolation



Dimensions



PIN assignment

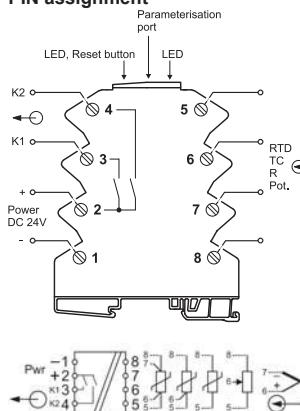

Description	Part-No.	Type	PU
Screw terminal Rated voltage U _N	DC 24 V	750370 R*	LCON TLS FDT 806210
Spring terminal Rated voltage U _N	DC 24 V	751370 S*	LCON TLS FDT 806211
Input			
Measurement input		PT100, PT1000, resistencia, potenciómetro	
		Thermal elements: Type B, C, E, J, K, N, R, S, T	
		Customer-specific via support points, polynomial	
Galvanic isolation I/O		2-way isolation	
Temperature range	PT: -220 ... 850 °C depending on type	Thermal elements: -210 ... 2310 °C depending on type	
Step response (10–90%)	TE: 10 – 750 ms, PT: 5 – 750 ms (adjustable by means of filter stage 1–5, default: 200 ms – filter stage 4)		
Input resistance		Thermocouples: 1 MΩ	
Sensor current	PT, potentiometer, resistance: 0.002–0.6 mA depending on type		
Circuit	PT - 2, 3, 4-wire, for 2-wire with offset correction, no external bridges necessary, autom. detection		
Output			
Output signal	adjustable via software FDT / DTM, connection via USB service cable		
Contact type	K1,K2: Semiconductor, N/O contact		
Max. switching voltage	DC 30 V		
Max. switching current	DC 100 mA, not short circuit protected		
Status display output	LED yellow K1 and LED yellow K2		
Operating mode	Limit value, window, alarm output / additionally adjustable: Hysteresis, input / output delay		
Operating data			
Linearity error	±0.1 % FSR		
Accuracy	PT: 10 K, divided by the set measurement range (K) + 0.2 % FSR Thermocouples: 10 K, divided by the set measurement range (K) + 0.4 % FSR		
General			
Rated voltage U _N	DC 24 V		
Operation voltage range	16.8–30 V		
Rated current	approx. 12 mA		
Status indication	LED green, yellow (K1, K2), red (error)		
Input/output protection	Overvoltage DC 30 V		
Connection type	Screw terminal 0.14 mm ² – 1.5 mm ² Spring terminal 0.14 mm ² – 1.5 mm ²		
Resolution	16-bit		
Temperature compensation internally	Thermal elements: type ±1 K , max. ±2 K		
Configuration	Software: FDT / DTM		
Temperature error	<100 ppm/K FSR		
Data storage	Flash		
Insulation voltage input / output	AC 2.5 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0)		
Color of the housing	light grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Operation temperature range	-40 °C ... +70 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 90.0 × 115.5 mm		
Weight	0.050 kg/piece		
Approvals	cULus (E135145), Cl.1 Div2, Gr. A, B, C, D, T4A, GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	480 fit		
Failure rate at +45 °C	2081733 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances		
Comments			
NOTE: The device can be configured using the DIP switches on the side or using the accessory LCON ZB service cable (Item no. 750894).			

Interface Technology · Microcompact analog/analog splitter


Input: 0–10 V, 0–20 mA, 4–20 mA adjustable

Output: 2 × 0–10 V, 0–20 mA, 4–20 mA


Insulation: 2.5 kV, 4-way isolation



Dimensions



PIN assignment

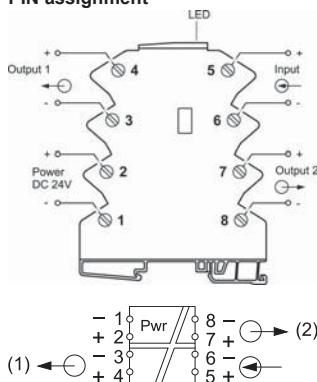

Range adjustment

S1 → Switch On							
Range	1 2	3 4	5 6	7 8			
0–10V	●	●	●				
0–20mA	●	●	●				
4–20mA	●	●	●	●			
Input					Output 1	Output 2	
Filter Off							
Filter On							
Output Limitation Off							
Output Limitation On							

See instruction leaflet for details

Description	Part-No.	Type	PU
Screw terminal Rated voltage U_N	DC 24 V	750321 R*	LCON AASP D 806210
Spring terminal Rated voltage U_N	DC 24 V	751321 S*	LCON AASP D 806211
Input			
Measurement input	0–10 V, 0–20 mA, 4–20 mA adjustable via switch		
Galvanic isolation I/O	4-way isolation		
Critical frequency	100 Hz (filter off), 5 Hz (filter on)		
Input resistance	>500 kΩ @ 0–10 V, <100 Ω @ 0–20 mA, <100 Ω @ 4–20 mA		
Zero / Span	Production comparison		
Output			
Output signal	0–10 V, 0–20 mA, 4–20 mA		
Max. load impedance at I-output	400 Ω @ 0–20 mA, 4–20 mA		
Max. load impedance at U-output	–		
Limitation for exceeding measurement range	yes, switchable		
max. modulation range/output signal/output current	10.5 V @ 0–10 V 21 mA @ 0–20 mA, 4–20 mA		
Residual ripple	<20 mVeff _{eff}		
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	±0.1 % FSR		
General			
Rated voltage U_N	DC 24 V		
Operation voltage range	16.8–30 V		
Rated current	13 mA		
Status indication	LED green/red		
Input/output protection	Overvoltage, current input with PTC fuse, short circuit-proof output		
Connection type	Screw terminal 0.14 mm ² – 1.5 mm ² Spring terminal 0.14 mm ² – 1.5 mm ²		
Resolution	16-bit		
Configuration	Switch		
Temperature error	<150 ppm/K FSR		
Data storage	Flash		
Insulation voltage input / output	2.5 kV _{eff}		
Housing material	PA 6.6 (UL 94 V-0)		
Color of the housing	light grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Operation temperature range	-40 °C ... +70 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 90.0 × 115.5 mm		
Weight	0.050 kg/piece		
Approvals	cULus (E135145) in preparation, Cl.1 Div2, Gr. A, B, C, D, T4A (E319134) in preparation, GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	663 fit		
Failure rate at +45 °C	1509179 h		
	1 fit equals one failure per 10 ⁹ component hours		
Comments	The indicated temperature is the mean component ambient temperature. The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		
Comments			
NOTE: The device can be configured using the DIP switches on the side or using the accessory LCON ZB service cable (Item no. 750894).			

Interface Technology · Microcompact analog/limit value switch


Input/output: 0–10 V, 0–20 mA, 4–20 mA, 2–10 mA, 0–5 V, 1–5 V, 2–10 V adjustable

Output: switching transistor DC 30 V/100 mA adjustable (LiveZero)


Insulation: 2.5 kV, 4-way isolation



Dimensions



PIN assignment

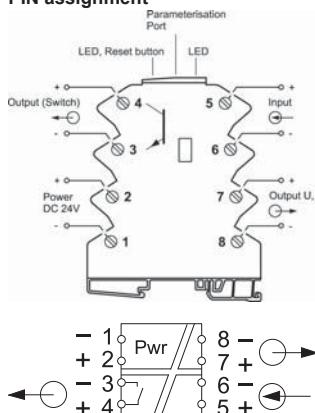

Range adjustment

S1		Switch On					
Range	1 2 3	4 5	6	7	8		
0–10V	●						
0–20mA	●	●					
4–20mA	●	●					
2–10mA	●	●					
0–5V	●	●					
1–5V	●	●					
2–10V	●	●					
Input							
Live Zero Off							
Live Zero On		●					
Filter Off							
Filter On			●				
Output Limitation Off							
Output Limitation On				●			


S 1–8 off: FDT/DTM
See instruction leaflet
for details

Description	Part-No.	Type	PU
Screw terminal			
Rated voltage U_N	DC 24 V	750322 R*	LCON AALS DFDT 806210
Spring terminal			
Rated voltage U_N	DC 24 V	751322 S*	LCON AALS DFDT 806211
Input			
Measurement input	0–10 V, 0–5 V, 1–5 V, 2–10 V, 0–20 mA, 4–20 mA, 2–10 mA adjustable via software FDT/DTM, connection via micro USB		
Galvanic isolation I/O	4-way isolation		
Delay ON/OFF	5 ms–650 ms (adjustable by means of filter stage 1–5, default: 150 ms)		
Step response (10–90%)	10 ms – 800 ms (adjustable by means of filter stage 1–5, default: 150 ms)		
Input resistance	>500 kΩ @ 0–10 V, 0–5 V, 1–5 V, 2–10 V, <100 Ω @ 0–20 mA, 4–20 mA, 2–10 mA		
Zero / Span	freely adjustable		
Output analogue			
Output signal	0–10 V, 0–5 V, 1–5 V, 2–10 V, 0–20 mA, 4–20 mA, 2–10 mA, adjustable via soft- ware FDT/DTM, connection via micro USB		
Max. load impedance at I-output	400 Ω @ 0–20 mA, 4–20 mA, 2–10 mA		
Max. load impedance at U-output	–		
Limitation for exceeding measure- ment range	yes, switchable		
max. modulation range/output sig- nal/output current	10.5 V @ 0–10 V, 0–5 V, 1–5 V, 2–10 V 21 mA @ 0–20 mA, 4–20 mA, 2–10 mA		
Residual ripple	<20 mVeff		
Output switching transistor			
Output signal	0–10 V, 0–5 V, 1–5 V, 2–10 V, 0–20 mA, 4–20 mA, 2–10 mA, adjustable via soft- ware FDT/DTM, connection via micro USB		
Contact type	Switching transistor not short-circuit proof		
Max. switching voltage	DC 30 V		
Max. switching current	DC 100 mA		
Status display output	LED yellow		
Operating mode	Limit value, timeframe, tendency+, tendency-, tendency+/-, inversion, error memory can be activated via switch and FDT/DTM		
LiveZero			
Operating data			
Accuracy	0.1 % FSR @ 23 °C		
Linearity error	±0.1 % FSR		
General			
Rated voltage U_N	DC 24 V		
Operation voltage range	16.8–30 V		
Rated current	13 mA		
Status indication	LED green/red		
Input/output protection	Oversupply, current input with PTC fuse, short circuit-proof output		
Connection type	Screw terminal 0.14 mm² – 1.5 mm² Spring terminal 0.14 mm² – 1.5 mm²		
Resolution	16-bit		
Configuration	Software: FDT / DTM		
Temperature error	<100 ppm/K FSR		
Data storage	Flash		
Insulation voltage input / output	2.5 kVeff		
Housing material	PA 6.6 (UL 94 V-0)		
Color of the housing	light grey		
Mounting	DIN rail mountable TS35 (EN 60715)		
Protection class	IP20		
Installation position	any		
Operation temperature range	-40 °C ... +70 °C		
Storage temperature range	-40 °C ... +85 °C		
Dimensions (w × h × d)	6.2 × 90.0 × 115.0 mm		
Weight	0.050 kg/piece		
Approvals	cULus (E135145) in preparation, Cl.1 Div2, Gr. A, B, C, D, T4A (E319134) in preparation, GL		
Standards	EN 60947-5-1		
Failure Rate Prediction (MTBF)			
Standards	Electronic components – Reliability – Reference conditions for failure rates and stress models for conversion: EN/IEC 61709 Failure Rates of Components – Expected values: SN 29500		
Failure rate at +45 °C	598 fit		
Failure rate at +45 °C	1671386 h		
1 fit equals one failure per 10^9 component hours			
The indicated temperature is the mean component ambient temperature.			
Comments	The results are valid under following conditions: Automotive environment or industrial areas without extreme dust levels and harmful substances Continuous operation 8760 h per year		
Comments			
NOTE: The device can be configured using the DIP switches on the side or using the accessory LCON ZB service cable (Item no. 750894).			

* S Article from stock
A Available with a lead time
R Available on request

Mounting Accessories

USB Service cable



Properties

- USB interface cable for parameterization of FDT/DTM capable LCON converters, time relays, etc.

Technical data

Status indication	LED green - status operation
Housing material	ABS
Color of the housing	transparent
Connection type	USB A – Micro USB
Operation temperature range	0 °C ... +40 °C
Storage temperature range	-25 °C ... +50 °C
Dimensions (w × h × d)	82.0 × 12.5 × 21.0 mm
Cable length	1.7 m
Weight	0.047 kg/piece

Part-No.	Type		PU piece
750894	S* LCON ZB USB	USB data cable for parameterization	1

* S Article from stock
A Available with a lead time
R Available on request

Interface Technology · LCIS accessories

Labeling system

200 Labeling tabs 5 × 5 mm



Description	Part-No.	Type	PU
Labelling plates			
Color	white	716431 S*	LOCC-Box-BZW 7-6431
	red	716432 S*	LOCC-Box-BZR 7-6432
	blue	716433 S*	LOCC-Box-BZB 7-6433
	yellow	716434 A*	LOCC-Box-BZG 7-6434
General			
Color	white	716431	716432
Design		red	blue
Material		PA 6.6 (UL 94 V0, NNF I2, F2)	
Operation temperature range		-40 °C ... +80 °C	
Storage temperature range		-40 °C ... +80 °C	
Weight		0.010 kg/piece	
Dimensions		5 × 5 mm	

* **S** Article from stock
A Available with a lead time
R Available on request



Interface Technology · LCIS accessories

Insulated jumper combs

2 to 16-pin
white



Dimensions



Description		Part-No.	Type	PU
Jumper comb				
Color	white	762803.1000	S* LCIS-BKW-2-polig	10
	white	762813.1000	S* LCIS-BKW-4-polig	10
	white	762823.1000	S* LCIS-BKW-8-polig	10
	white	762833.1000	S* LCIS-BKW-16-polig	10
General		762803.1000	762813.1000	762823.1000
Pole number	2	4	8	16
Connection type			plug-in	
Rated current			DC 6 A	
Contact design			Flat contact 0.5 mm Ribbing on the sides	
Pin spacing			6.2 mm	
Length	12.4 mm	24.8 mm	49.6 mm	99.2 mm
Contact material			CuZn	
Material			Frianyl A3 RV0	
Color			white	
Flamability according to UL 94			V0	
Operation temperature range			-40 °C ... +80 °C	
Storage temperature range			-40 °C ... +80 °C	
Weight			0.011 kg/piece	

Interface Technology · Microcompact Accessories


Insulated jumper combs

2 to 16-pin

white



Dimensions

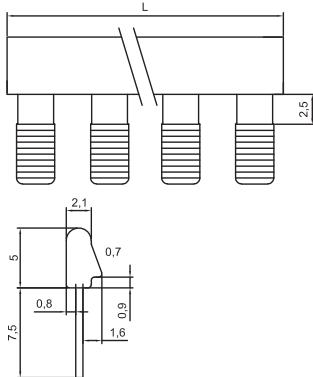

Description	Part-No.	Type	PU
Jumper comb			
Color	762803	S*	BK 7-2803 WE 2-polig
white	762806	S*	BK 7-2806 WE 3-polig
white	762813	S*	BK 7-2813 WE 4-polig
white	762823	S*	BK 7-2823 WE 8-polig
white	762833	S*	BK 7-2833 WE 16polig
General			
Pole number	762803	762806	762813
2	3	4	8
Connection type			plug-in
Rated current			DC 6 A
Contact design			Flat contact 0.5 mm Ribbing on the sides
Pin spacing			6.2 mm
Length	12.4 mm	18.6 mm	24.8 mm
Contact material			CuZn
Material			Vectra C130
Color			white
Flamability according to UL 94			V0
Operation temperature range			-40 °C ... +80 °C
Storage temperature range			-40 °C ... +80 °C
Weight	0.0006 kg/ piece	0.0008 kg/ piece	0.0011 kg/ piece
			0.0022 kg/ piece
			0.0044 kg/ piece

* S Article from stock
A Available with a lead time
R Available on request

Part number index

Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page	Part-No.	Page
716431	45	751541	35						
716432	45	751557.0000	25						
716433	45	751809.0000	27						
716434	45	751817.0000	29						
750320	38	751819.0000	28						
750321	42	751839.0000	30						
750322	43	751847.0000	31						
750340	39	751848.0000	32						
750360	40	751901.0000	26						
750370	41	762803	47						
750510.0000	22	762803.1000	46						
750511.0000	16	762806	47						
750512.0000	23	762813	47						
750516.0000	24	762813.1000	46						
750517.0000	24	762823	47						
750518.0000	21	762823.1000	46						
750519.0000	21	762833	47						
750528.0000	15	762833.1000	46						
750530.0000	18								
750531.0000	18								
750532.0000	18								
750533.0000	19								
750534.0000	19								
750535.0000	19								
750536.0000	20								
750537.0000	20								
750538.0000	20								
750539.0000	17								
750540	33								
750541	34								
750542	35								
750557.0000	25								
750809.0000	27								
750817.0000	29								
750819.0000	28								
750839.0000	30								
750847.0000	31								
750848.0000	32								
750894	44								
750901.0000	26								
751320	38								
751321	42								
751322	43								
751340	39								
751360	40								
751370	41								
751510.0000	22								
751511.0000	16								
751512.0000	23								
751516.0000	24								
751517.0000	24								
751518.0000	21								
751519.0000	21								
751528.0000	15								
751530.0000	18								
751531.0000	18								
751532.0000	18								
751533.0000	19								
751534.0000	19								
751535.0000	19								
751536.0000	20								
751537.0000	20								
751538.0000	20								
751539.0000	17								
751541	34								

Notes

Notes



GOGATEC GmbH
Petritschgasse 20
A-1210 Wien
Tel.: +43 1 258 3 257 0
Fax: +43 1 258 3 257 17
office@gogatec.com
www.gogatec.com

Copyright

Protected trademarks and trade names are not always labelled as such in this publication. This does not mean they are free names as defined in the trademark and brand mark law. Publication does not imply that the descriptions or pictures used are free from rights of third parties. The information is published without regard to possible patent protection. Trade names are used without any guarantee that they can be used freely. In putting together text, pictures and data, we proceeded with the greatest care. Despite this, the possibility of errors cannot be completely excluded. We therefore reject any legal responsibility or liability. We are, of course, grateful for any recommendations for improvement or information useful for making corrections or establishing the truth. But the author does not assume any responsibility for the content of these documents.

Cable Solutions
High flexing cables for industrial applications

Connectivity Solutions
Industrial Ethernet, assembled cables,
Actuator Sensor Interface, connectors and
suppression technology

Cabinet Solutions
AirSTREAM complete system for thermally
optimized and space-saving cabinet wiring

Control Solutions
Industrial Power Supplies and electronic current
control for Industrial Internet of Things. Infrastructure
for industrial networks, signal converter, relays and
modular electronics housing

Transportation Solutions
Solutions for the demanding Railway Sector,
for example control technology,
Interface solutions and signalling

Germany
Friedrich Lütze GmbH
Postfach 1224 (PLZ 71366)
Bruckwiesenstraße 17-19
D-71384 Weinstadt
Tel.: +49 7151 60 53-0
Fax: +49 7151 60 53-277(-288)
info@luetze.de

USA
LUTZE INC.
13330 South Ridge Drive
Charlotte, NC 28273
Tel.: +1 704 504-0222
Fax: +1 704 504-0223
info@lutze.com

United Kingdom
LÜTZE Ltd.
Unit 3 Sandy Hill Park
Sandy Way, Avington
Tamworth, Staffs, B77 4DU
Tel.: +44 1827 313330
Fax: +44 1827 313332
sales.gb@lutze.co.uk

Austria
LÜTZE Elektrotechnische
Erzeugnisse Ges.m.b.H.
office@luetze.at

Switzerland
LÜTZE AG
info@luetze.ch

France
LUTZE SASU
lutze@lutze.fr

Spain
LUTZE, S.L.
info@lutze.es

China
Luetze Trading (Shanghai) Co.Ltd.
info@luetze.cn



SkyBLUE
LÜTZE



RoHS

Climate neutral
Print product
ClimatePartner.com/12146-1910-1006



www.lutze.com

LÜTZE
SYSTEMATIC TECHNOLOGY