

IL-BRID


Soft closing, strong hold



Standard enclosures with IL-BRID levers

Specific industrial applications demand the design of equally customized connection solutions capable of covering each distinct installation requirement.

Among the enclosures' locking systems introduced by ILME in its product offer, the IL-BRID mechanism, a lever in thermoplastic material with a stainless-steel core, combines the technical characteristics of both these materials for durable but significantly low-wear design.



SUM-UP

CL – ML series

- > Made of die cast aluminium alloy
- > Gaskets in anti-aging, oil-resistant, grease-resistant and fuel resistant vinyl nitrile elastomer
- > IL-BRID locking device in self-extinguishing thermoplastic material and stainless steel core
- > Ambient temperature range: -40 °C / +125 °C

≡ Markings and Approvals


- CE and UK markings, EAC not applicable
- UL certified for USA and Canada for Type 12, 4 and 4X degrees of protection (enclosure type ratings, equivalent to NEMA rating)
- IP65 / IP66 / IP69 degree of protection
- RoHS: compliant

FOCUS

Levers and technology

The IL-BRID mechanism, a lever made of thermoplastic with a stainless-steel core, combines the technical characteristics of both materials for a durable but significantly low-wear design.

The IL-BRID locking lever is compatible with the entire range of ILME enclosures with pegs (in single or double-lever configuration) and offers an IP65 or IP66 / IP69 degree of protection, depending on the model.



▶ Thermoplastic handle

▶ Stainless-steel core

▶ V-shaped ribs to improve stiffness of handles



▶ Soft closing 1st touch



▶ Strong hold 2nd touch



IL-BRID series

Housings and covers – 1 lever – with gasket

size **44.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 1 lever and gasket, with or without metal cover	CLI 06 L	CLI 06 LS		
	Surface mounting housings, 1 lever and gasket, with or without metal cover	MLP 06 L20 MLP 06 L220	MLP 06 LS20 MLP 06 LS220	M20 M20 × 2	
	Surface mounting housings, 1 lever and gasket, with or without metal cover high construction To be used only with a complete cable gland	MLAP 06 L25 MLAP 06 L225 MLAP 06 L32 MLAP 06 L232 MLAP 06 L40 MLAP 06 L240	MLAP 06 LS32 MLAP 06LS232 MLAP 06 LS40 MLAP 06LS240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Covers, 1 lever and gasket For enclosures with 2 pegs without gasket with loop for hoods	CLC 06 LG			

Inserts size 44.27	Poles	Pages
CNE	16 A 6 + ⊕	B.38
CCE	16 A 6 + ⊕	B.44
CSH / JSH S	16 A 6 + ⊕	B.52,58
CQE / CQEY	16 A 10 + ⊕	B.72,82
CDD	10 A 24 + ⊕	B.94
CDSH / CDSH NC	10 A 9 and 6 + ⊕	B.102,108
CSS	16 A 6 + ⊕	B.118
CT / CTSE*	16 A 6 + ⊕	B.126,130

*can be used only in bulkhead mounting housings

MIXO Modular Inserts	Pages
MIXO modules	C.12-93
CX 02 T (2-slot sized MIXO frames)	C.95

Complete with:

Hoods
Page E.49Covers
Page E.52

IL-BRID series

Hoods – 1 lever – with gasket

size **44.27**
**Heavy-Duty
Applications**

CE UK




EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 1 lever and gasket, top entry		MLV 06 LG25	M25	
	Hoods, 1 lever and gasket, top entry, high construction, with metal adapter		MLAV 06 LG25 MLAV 06 LG32	M25 M32	
	Hoods, 1 lever and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 06 LG40	MLFV 06 LG25 MLFV 06 LG32 MLFV 06 LG40	M25 M32 M40	

IL-BRID

E

Inserts size 44.27	Poles	Pages
CNE	16 A 6 + ⊕	B.38
CCE	16 A 6 + ⊕	B.44
CSH / JSH S	16 A 6 + ⊕	B.52,58
CQE / CQEY	16 A 10 + ⊕	B.72,82
CDD	10 A 24 + ⊕	B.94
CDSH / CDSH NC	10 A 9 and 6 + ⊕	B.102,108
CSS	16 A 6 + ⊕	B.118

MIXO Modular Inserts	Pages
MIXO modules	C.12-93
CX 02 T (2-slot sized MIXO frames)	C.95

Complete with:


Hoods
Page E.49

Covers
Page E.52

IL-BRID series

Housings and covers – 1 lever – with gasket

size **57.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 1 lever and gasket, with or without metal cover	CLI 10 L	CLI 10 LS		
	Surface mounting housings, 1 lever and gasket, with or without metal cover	MLP 10 L20 MLP 10 L220	MLP 10 LS20 MLP 10 LS220	M20 M20 × 2	
	Surface mounting housings, 1 lever and gasket, with or without metal cover high construction	MLAP 10 L32 MLAP 10 L232 MLAP 10 L40 MLAP 10 L240	MLAP 10 LS32 MLAP 10 LS232 MLAP 10 LS40 MLAP 10 LS240	M32 M32 × 2 M40 M40 × 2	
	Covers, 1 lever and gasket	CLC 10 LG			
	For enclosures with 2 pegs without gasket with loop for hoods				

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CT / CTSE*	16 A	10 + ☉ B.127,131
CCE	16 A	10 + ☉ B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CSH / JSH S	16 A	10 + ☉ B.53,59	CX	40 A/10 A	8/24 + ☉ B.170-171
CSHT	16 A	10 + ☉ B.66	*can be used only in bulkhead mounting housings		
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95

Complete with:

Hoods
Page E.55Covers
Page E.60

IL-BRID series

Hoods – 1 lever – with gasket

size **57.27**
**Heavy-Duty
Applications**

CE UK




EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 1 lever and gasket, top entry		MLV 10 LG25	M25	
	Hoods, 1 lever and gasket, top entry, high construction, with metal adapter		MLAV 10 LG25 MLAV 10 LG32	M25 M32	
	Hoods, 1 lever and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 06 LG40	MLFV 10 LG25 MLFV 10 LG32 MLFV 10 LG40	M25 M32 M40	

IL-BRID

E

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CCE	16 A	10 + ☉ B.45	CX	40 A/10 A	8/24 + ☉ B.170-171
CSH / JSH S	16 A	10 + ☉ B.53,59			
CSHT	16 A	10 + ☉ B.66			
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95

Complete with:


Hoods
Page E.55

Covers
Page E.60

IL-BRID series

Housings and covers – 2 levers – with gasket


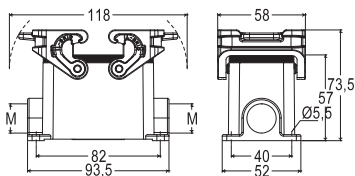
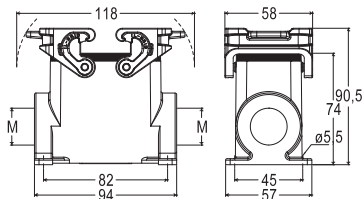



size **57.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CLI 10		
	Surface mounting housings, 2 levers and gasket	MLP 10.20 MLP 10.220	M20 M20 × 2	
	Surface mounting housings, 2 levers and gasket, high construction	MLAP 10.25 MLAP 10.225 MLAP 10.32 MLAP 10.232 MLAP 10.40 MLAP 10.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Covers, 2 levers and gasket	CLC 10 G		
	For enclosures with 4 pegs without gasket with loop for hoods 			

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CT / CTSE*	16 A	10 + ☉ B.127,131
CCE	16 A	10 + ☉ B.45	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CSH / JSH S	16 A	10 + ☉ B.53,59	CX	40 A/10 A	8/24 + ☉ B.170-171
CSHT	16 A	10 + ☉ B.66	*can be used only in bulkhead mounting housings		
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95

Complete with:


Hoods
Page E.57,61

Covers
Page E.60

IL-BRID series

Hoods – 2 levers – with gasket




size **57.27**
**Heavy-Duty
Applications**

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 levers and gasket, top entry		MLV 10 G25	M25	
	Hoods, 2 levers and gasket, top entry, high construction, with metal adapter		MLAV 10 G25 MLAV 10 G32 MLAV 10 G40	M25 M32 M40	
 	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 10 G40	MLFV 10 G25 MLFV 10 G32 MLFV 10 G40	M25 M32 M40	

IL-BRID

E

Inserts size 57.27	Poles	Pages	Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39	CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CCE	16 A	10 + ☉ B.45	CX	40 A/10 A	8/24 + ☉ B.170-171
CSH / JSH S	16 A	10 + ☉ B.53,59			
CSHT	16 A	10 + ☉ B.66			
CQE / CQEY	16 A	18 + ☉ B.73,83			
CDD	10 A	42 + ☉ B.95			
CDSH	10 A	18 + ☉ B.103			
CSS	16 A	10 + ☉ B.119			
			MIXO Modular Inserts		Pages
			MIXO modules		C.12-93
			CX 03 T (3-slot sized MIXO frames)		C.95

Complete with:


Hoods
Page E.57,61

Covers
Page E.60

IL-BRID series

Housings and covers – 1 lever – with gasket

size **77.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 1 lever and gasket, with or without metal cover	CLI 16 L	CLI 16 LS		
	Surface mounting housings, 1 lever and gasket, with or without metal cover	MLP 16 L25 MLP 16 L225	MLP 16 LS25 MLP 16 LS225	M25 M25 × 2	
	Surface mounting housings, 1 lever and gasket, with or without metal cover high construction	MLAP 16 L32 MLAP 16 L232 MLAP 16 L40 MLAP 16 L240	MLAP 16 LS32 MLAP 16 LS232 MLAP 16 LS40 MLAP 16 LS240	M32 M32 × 2 M40 M40 × 2	
	Covers, 1 lever and gasket	CLC 16 LG			
	For enclosures with 2 pegs without gasket with loop for hoods				

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CT / CTSE* 16 A	16 + ⊕	B.128,132		
CSHT 16 A	16 + ⊕	B.67	CT / CTS* 10 A	40 + ⊕	B.138,140		
CQE / CQEQ 16 A	32 + ⊕	B.74,84	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CQEE 16 A	40 + ⊕	B.78	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CD 10 A	40 + ⊕	B.90	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

*can be used only in bulkhead mounting housings

Complete with:

Hoods
Page E.63Covers
Page E.68

IL-BRID series

Hoods – 1 lever – with gasket

size **77.27**
**Heavy-Duty
Applications**


CE UK

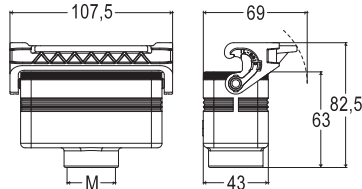
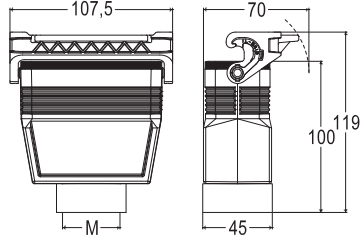
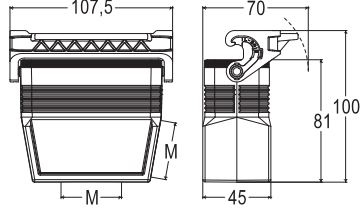
EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 1 lever and gasket, top entry		MLV 16 LG32	M32	
	Hoods, 1 lever and gasket, top entry, high construction, with metal adapter		MLAV 16 LG25 MLAV 16 LG32 MLAV 16 LG40	M25 M32 M40	
	Hoods, 1 lever and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 16 LG40	MLFV 16 LG25 MLFV 16 LG32 MLFV 16 LG40	M25 M32 M40	

IL-BRID

E

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CSHT 16 A	16 + ⊕	B.67	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CQE / CQEY 16 A	32 + ⊕	B.74,84					
CQEE 16 A	40 + ⊕	B.78	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CD 10 A	40 + ⊕	B.90					
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

Complete with:


Hoods
Page E.63

Covers
Page E.68

IL-BRID series

Housings and covers – 2 levers – with gasket


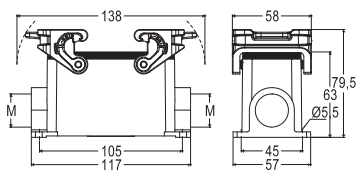
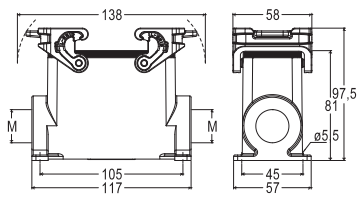


size **77.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CLI 16		
	Surface mounting housings, 2 levers and gasket	MLP 16.25 MLP 16.225	M25 M25 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	MLAP 16.25 MLAP 16.225 MLAP 16.32 MLAP 16.232 MLAP 16.40 MLAP 16.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Covers, 2 levers and gasket For enclosures with 4 pegs without gasket with loop for hoods 	CLC 16 G		

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CT / CTSE* 16 A	16 + ⊕	B.128,132		
CSHT 16 A	16 + ⊕	B.67	CT / CTS* 10 A	40 + ⊕	B.138,140		
CQE / CQEY 16 A	32 + ⊕	B.74,84	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CQEE 16 A	40 + ⊕	B.78	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CD 10 A	40 + ⊕	B.90	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

*can be used only in bulkhead mounting housings

Complete with:

Hoods
Page E.65,69Covers
Page E.68

IL-BRID series

Hoods – 2 levers – with gasket

size **77.27**Heavy-Duty
Applications

CE UK






(pending CQC)



ECBT2.E115072 | ECBT8.E115072

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 levers and gasket, top entry		MLV 16 G32	M32	
	Hoods, 2 levers and gasket, top entry, high construction, with metal adapter		MLAV 16 G25 MLAV 16 G32 MLAV 16 G40	M25 M32 M40	
	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 16 G40	MLFV 16 G25 MLFV 16 G32 MLFV 16 G40	M25 M32 M40	

IL-BRID

E

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	16 + ⊕	B.40	CP / CPY 35 A	6 + ⊕	B.112,114	MIXO modules	C.12-93
CCE 16 A	16 + ⊕	B.46	CSS 16 A	16 + ⊕	B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	16 + ⊕	B.54,60	CMCE / CMSH 16 A	6 + 2 (aux.) + ⊕	B.145,150		
CSHT 16 A	16 + ⊕	B.67	CX / CXC 80 A/16 A	4/0, 4/2 + ⊕	B.158-160		
CQE / CQEY 16 A	32 + ⊕	B.74,84					
CQEE 16 A	40 + ⊕	B.78	CX 40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ⊕	B.163-164, 168-169		
CD 10 A	40 + ⊕	B.90					
CDD 10 A	72 + ⊕	B.94					
CDSH 10 A	27 + ⊕	B.104					

Complete with:

Hoods
Page E.65,69Covers
Page E.68

IL-BRID series

Housings and covers – 1 lever – with gasket

size **104.27**Heavy-Duty
Applications

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	With cover	Entry	Dimension
	Bulkhead mounting housings, 1 lever and gasket, with or without metal cover	CLI 24 L	CLI 24 LS		
	Surface mounting housings, 1 lever and gasket, with or without metal cover	MLP 24 L25 MLP 24 L225	MLP 24 LS25 MLP 24 LS225	M25 M25 × 2	
	Surface mounting housings, 1 lever and gasket, with or without metal cover high construction	MLAP 24 L32 MLAP 24 L232 MLAP 24 L40 MLAP 24 L240	MLAP 24 LS32 MLAP 24 LS232 MLAP 24 LS40 MLAP 24 LS240	M32 M32 × 2 M40 M40 × 2	
	Covers, 1 lever and gasket	CLC 24 LG			
	For enclosures with 2 pegs without gasket with loop for hoods				

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE 16 A	24 + ⊕	B.41	CSS 16 A	24 + ⊕	B.121	MIXO modules	C.12-93
CCE 16 A	24 + ⊕	B.47	CT / CTSE* 16 A	24 + ⊕	B.129,133	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S 16 A	24 + ⊕	B.55,61	CT / CTS* 10 A	64 + ⊕	B.139,141		
CSHT 16 A	24 + ⊕	B.68	CMCE / CMSH 16 A	10 + 2 (aux.) + ⊕	B.146,151		
CQE / CQEQ 16 A	46 + ⊕	B.75,85	CX 100 A/16 A	8/0 and 6/6 + ⊕	B.156-157		
CQEE 16 A	64 + ⊕	B.79	CX / CXC 80 A/16 A	4/8 + ⊕	B.161-162		
CD 10 A	64 + ⊕	B.91	*can be used only in bulkhead mounting housings				
CDD 10 A	108 + ⊕	B.97					
CDSH 10 A	42 + ⊕	B.105					

Complete with:

Hoods
Page E.71Covers
Page E.76

IL-BRID series

Hoods – 1 lever – with gasket

size **104.27**
**Heavy-Duty
Applications**

CE UK

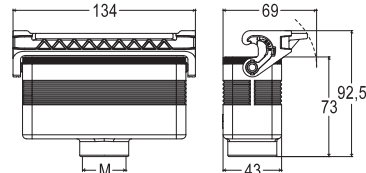
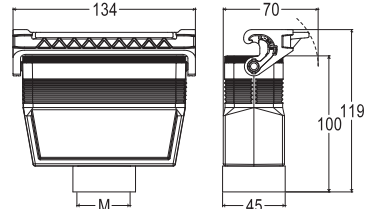
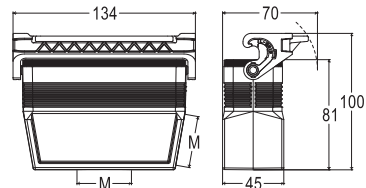
EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 1 lever and gasket, top entry		MLV 24 LG32	M32	
	Hoods, 1 lever and gasket, top entry, high construction, with metal adapter		MLAV 24 LG25 MLAV 24 LG32 MLAV 24 LG40	M25 M32 M40	
 	Hoods, 1 lever and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 24 LG40	MLFV 24 LG25 MLFV 24 LG32 MLFV 24 LG40	M25 M32 M40	

IL-BRID

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CSHT	16 A	24 + ☉ B.68	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CQE / CQEY	16 A	46 + ☉ B.75,85					
CQEE	16 A	64 + ☉ B.79					
CD	10 A	64 + ☉ B.91					
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:


Hoods
Page E.71

Covers
Page E.76

IL-BRID series

Housings and covers – 2 levers – with gasket


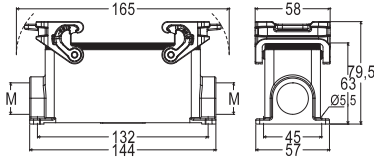
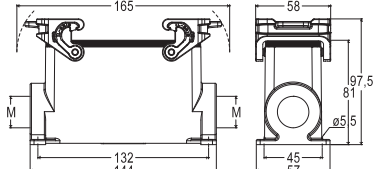

size **104.27**
**Heavy-Duty
Applications**


CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Bulkhead mounting housings, 2 levers and gasket	CLI 24		
	Surface mounting housings, 2 levers and gasket	MLP 24.25 MLP 24.225	M25 M25 × 2	
	Surface mounting housings, 2 levers and gasket, high construction To be used only with a complete cable gland	MLAP 24.25 MLAP 24.225 MLAP 24.32 MLAP 24.232 MLAP 24.40 MLAP 24.240	M25 M25 × 2 M32 M32 × 2 M40 M40 × 2	
	Covers, 2 levers and gasket For enclosures with 4 pegs without gasket with loop for hoods 	CLC 24 G		

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CT / CTSE*	16 A	24 + ☉ B.129,133	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CT / CTS*	10 A	64 + ☉ B.139,141		
CSHT	16 A	24 + ☉ B.68	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151		
CQE / CQEQ	16 A	46 + ☉ B.75,85	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CQEE	16 A	64 + ☉ B.79	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CD	10 A	64 + ☉ B.91	*can be used only in bulkhead mounting housings				
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:


Hoods
Page E.73,77

Covers
Page E.76

IL-BRID series

Hoods – 2 levers – with gasket

size **104.27**
**Heavy-Duty
Applications**

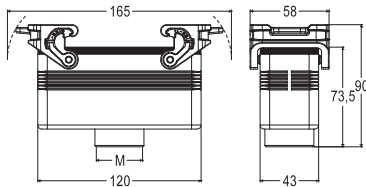
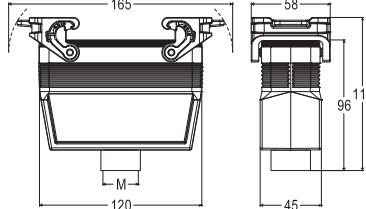
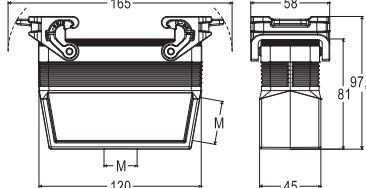
CE UK


(pending CQC)



ECBT2.E115072 | ECBT8.E115072

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

Item	Description	Side entry	Top entry	Entry	Dimension
	Hoods, 2 levers and gasket, top entry		MLV 24 G32	M32	
	Hoods, 2 levers and gasket, top entry, high construction, with metal adapter		MLAV 24 G25 MLAV 24 G32 MLAV 24 G40	M25 M32 M40	
	Hoods, 2 levers and gasket, side or top entry, high construction To be used only with a complete cable gland	MLFO 24 G40	MLFV 24 G25 MLFV 24 G32 MLFV 24 G40	M25 M32 M40	

IL-BRID

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CSHT	16 A	24 + ☉ B.68	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CQE / CQEY	16 A	46 + ☉ B.75,85					
CQEE	16 A	64 + ☉ B.79					
CD	10 A	64 + ☉ B.91					
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:


Hoods
Page E.73,77

Covers
Page E.76



IL-BRID series



Hoods – 1 lever – without gasket

size **44.27****Heavy-Duty
Applications****CE UK**

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, 1 lever, without gasket, side entry	MLO 06 LX20 MLO 06 LX25	M20 M25	
	Hoods, 1 lever, without gasket, top entry	MLV 06 LX20 MLV 06 LX25	M20 M25	

Inserts size 44.27	Poles	Pages
CNE	16 A 6 + ⊕	B.38
CCE	16 A 6 + ⊕	B.44
CSH / JSH S	16 A 6 + ⊕	B.52,58
CQE / CQEY	16 A 10 + ⊕	B.72,82
CDD	10 A 24 + ⊕	B.94
CDSH / CDSH NC	10 A 9 and 6 + ⊕	B.102,108
CSS	16 A 6 + ⊕	B.118

MIXO Modular Inserts	Pages
MIXO modules	C.12-93
CX 02 T (2-slot sized MIXO frames)	C.95

Complete with:**Housings**
Page E.50**Covers**
Page E.52

IL-BRID series

Hoods – 2 levers – without gasket

size **57.27**Heavy-Duty
Applications

CE UK

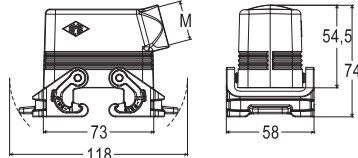
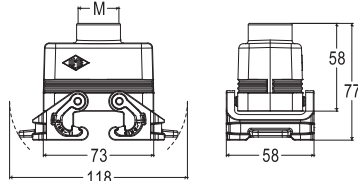
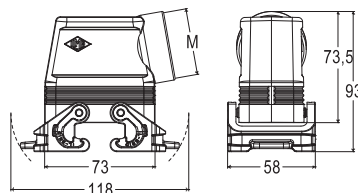
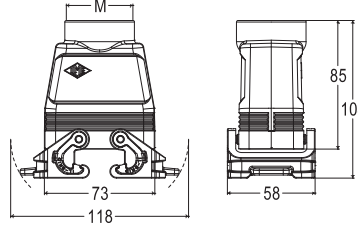
EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, 2 levers, without gasket, side entry	MLO 10 X20 MLO 10 X25	M20 M25	
	Hoods, 2 levers, without gasket, top entry	MLV 10 X20 MLV 10 X25	M20 M25	
	Hoods, 2 levers, without gasket, side entry, high construction	MLAO 10 X32 MLAO 10 X40	M32 M40	
	Hoods, 2 levers, without gasket, top entry, high construction	MLAV 10 X32 MLAV 10 X40	M32 M40	

IL-BRID

E

Inserts size 57.27	Poles	Pages
CNE	16 A	10 + ☉ B.39
CCE	16 A	10 + ☉ B.45
CSH / JSH S	16 A	10 + ☉ B.53,59
CSHT	16 A	10 + ☉ B.66
CQE / CQEY	16 A	18 + ☉ B.73,83
CDD	10 A	42 + ☉ B.95
CDSH	10 A	18 + ☉ B.103
CSS	16 A	10 + ☉ B.119

Inserts size 57.27	Poles	Pages
CMCE / CMSH	16 A	3 + 2 (aux.) + ☉ B.144,149
CX	40 A/10 A	8/24 + ☉ B.170-171
MIXO Modular Inserts		Pages
MIXO modules		C.12-93
CX 03 T (3-slot sized MIXO frames)		C.95

Complete with:

Housings
Page E.58Covers
Page E.60

IL-BRID series

Hoods – 2 levers – without gasket









size **77.27**
**Heavy-Duty
Applications**

CE UK

EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500

(pending CQC)

ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, 2 levers, without gasket, side entry	MLO 16 X25 MLO 16 X32	M25 M32	 
	Hoods, 2 levers, without gasket, top entry	MLV 16 X25 MLV 16 X32	M25 M32	 
	Hoods, 2 levers, without gasket, side entry, high construction	MLAO 16 X32 MLAO 16 X40	M32 M40	 
	Hoods, 2 levers, without gasket, top entry, high construction	MLAV 16 X32 MLAV 16 X40	M32 M40	 

Inserts size 77.27	Poles	Pages	Inserts size 77.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	16 + ☉ B.40	CP / CPY	35 A	6 + ☉ B.112,114	MIXO modules	C.12-93
CCE	16 A	16 + ☉ B.46	CSS	16 A	16 + ☉ B.120	CX 04 T (4-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	16 + ☉ B.54,60	CMCE / CMSH	16 A	6 + 2 (aux.) + ☉ B.145,150		
CSHT	16 A	16 + ☉ B.67	CX / CXC	80 A/16 A	4/0, 4/2 + ☉ B.158-160		
CQE / CQEY	16 A	32 + ☉ B.74,84					
CQEE	16 A	40 + ☉ B.78	CX	40 A/10 A	6/12, 6/36, 9/42 and 12/2 + ☉ B.163-164, 168-169		
CD	10 A	40 + ☉ B.90					
CDD	10 A	72 + ☉ B.94					
CDSH	10 A	27 + ☉ B.104					

Complete with:


Housings
Page E.66

Covers
Page E.68

IL-BRID series

Hoods – 2 levers – without gasket

size **104.27**Heavy-Duty
Applications

CE UK









EN 60529	IP65 / IP66 / IP69
UL 50 / UL 50E	Type 12 / 4 / 4X
Ambient temperature limits	-40 °C ... +125 °C
Mechanical life (cycles)	≥ 500



(pending CQC)



ECBT2.E115072 | ECBT8.E115072

Item	Description	Part No.	Entry	Dimension
	Hoods, 2 levers, without gasket, side entry	MLO 24 X25 MLO 24 X32	M25 M32	 
	Hoods, 2 levers, without gasket, top entry	MLV 24 X25 MLV 24 X32	M25 M32	 
	Hoods, 2 levers, without gasket, side entry, high construction	MLAO 24 X32 MLAO 24 X40	M32 M40	 
	Hoods, 2 levers, without gasket, top entry, high construction	MLAV 24 X32 MLAV 24 X40	M32 M40	 

IL-BRID

E

Inserts size 104.27	Poles	Pages	Inserts size 104.27	Poles	Pages	MIXO Modular Inserts	Pages
CNE	16 A	24 + ☉ B.41	CSS	16 A	24 + ☉ B.121	MIXO modules	C.12-93
CCE	16 A	24 + ☉ B.47	CMCE / CMSH	16 A	10 + 2 (aux.) + ☉ B.146,151	CX 06 T (6-slot sized MIXO frames)	C.95
CSH / JSH S	16 A	24 + ☉ B.55,61	CX	100 A/16 A	8/0 and 6/6 + ☉ B.156-157		
CSHT	16 A	24 + ☉ B.68	CX / CXC	80 A/16 A	4/8 + ☉ B.161-162		
CQE / CQEY	16 A	46 + ☉ B.75,85					
CQEE	16 A	64 + ☉ B.79					
CD	10 A	64 + ☉ B.91					
CDD	10 A	108 + ☉ B.97					
CDSH	10 A	42 + ☉ B.105					

Complete with:

Housings
Page E.74Covers
Page E.76